

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L641751427

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	510 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	7,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	55	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	50	
	Depth	50	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,416
Parameters for directional light sources:			
Peak luminous intensity (cd)	900	Beam angle in degrees, or the range of beam angles that can be set	40
Parameters for LED and OLED light sources:			
R9 colour rendering index value	9	Survival factor	0,70
the lumen maintenance factor	0,70		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,70	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,7	Stroboscopic effect metric (SVM)	0,9

(a)'.': not applicable;

(b)'.': not applicable;


SPL Spectrum Test Report

Sample	:	Date	:	2021-07-01 09:23:53
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	Renee
		Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	50624 (77%)
Test Mode	:	Fast Test	T	:	34 ms
			Sensitivity	:	High

Spectrum

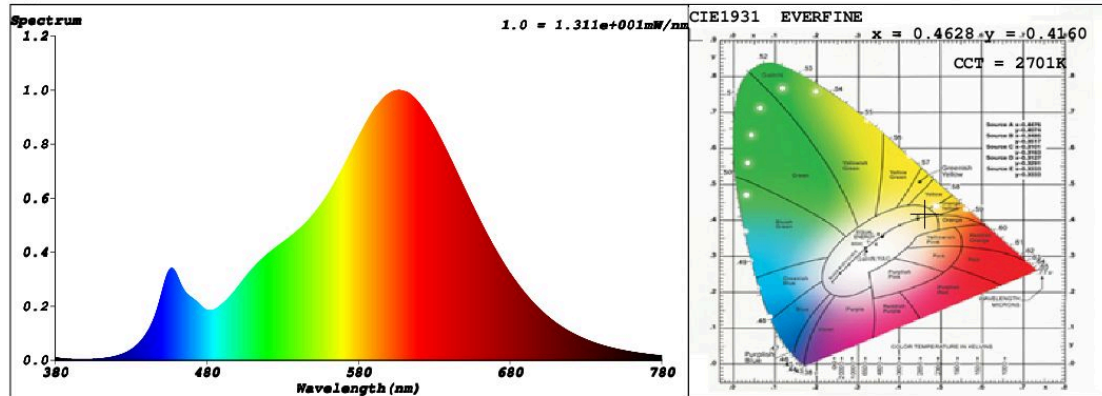

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4628$ $y = 0.4160$ / $u' = 0.2620$ $v' = 0.5298$ ($duv=1.74e-03$)

CCT= 2701K Prcp WL: Ld=583.7nm Purity=63.8%

Peak WL: Lp=607nm FWHM: =118.1nm Ratio:R=25.1% G=72.6% B=2.3%

Render Index: Ra = 82.6

R1 =81 R2 =92 R3 =95 R4 =80 R5 =81 R6 =92 R7 =82

R8 =58 R9 =9 R10=83 R11=79 R12=75 R13=84 R14=98 R15=73

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 600.91 lm Eff. : 89.45 lm/W Fe = 1.8711 W


Electrical parameters

V = 229.9 V I = 0.03182 A P = 6.718 W PF = 0.9184

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021



EPREL registration number: 779301

<https://eprel.ec.europa.eu/qr/779301>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands