

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Nordlux

**Supplier's address:** Nordlux A/S, Østre Havnegade 34, 9000 Aalborg, DK

**Model identifier:** 2019051003

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	LED Module		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	700 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	5,4	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	115	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	115	
	Depth	115	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,440 0,403
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	15	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,00	Colour consistency in McAdam ellipses	0
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)-: not applicable;

(b)-: not applicable;

## 参数

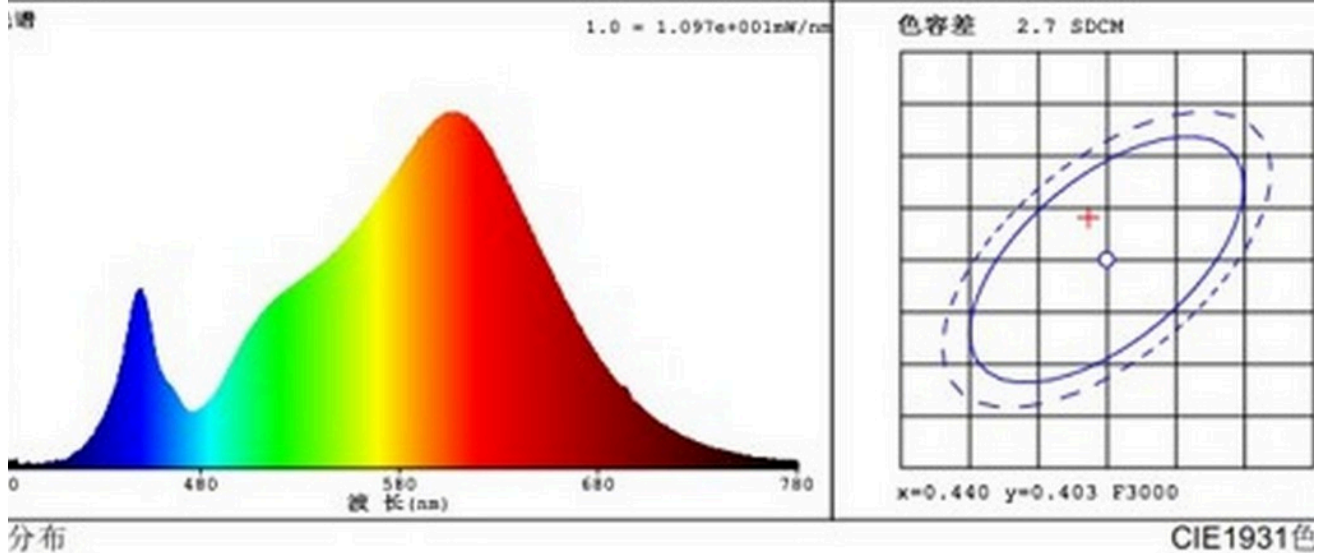

## 颜色参数

坐标:  $x = 0.4387$   $y = 0.4071$  /  $u' = 0.2504$   $v' = 0.5228$  ( $duv=9.59e-04$ )

色温: CCT=2996K 主波长:  $\lambda_d=582.5\text{nm}$  色纯度: Purity=53.9%

波长:  $\lambda_p=606\text{nm}$  半峰带宽: FWHM=136.4nm 色比: R=23.2% G=74.4% B=2.4%

指数: Ra = 84.6

83 R2 =91 R3 =97 R4 =84 R5 =83 R6 =89 R7 =85

64 R9 =16 R10=79 R11=85 R12=74 R13=85 R14=98 R15=76

:OUT 白光分类:ANSI\_3000K

## 辐射度参数

量  $\Phi = 536.71\text{lm}$  光效: 84.51 lm/W 辐射通量  $\Phi_e = 1.6586\text{W}$

## 电参数

V = 230.5 V 电流 I = 0.03761 A 功率 P = 6.351 W 功率因数 PF = 0.7326 频率=49.99 Hz