## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's address:** Customer care, Østergade, Copenhagen, DK

Model identifier: Ambit Wall Lamp


_		•	•••			
11/1	20	Λt	$\mathbf{H}\boldsymbol{\alpha}$	nt	$c \cap$	urca.
1 7 1	JE	UI.	IIE	116	30	urce:

Product parameters					
Anti-glare shield:	No	Dimmable:	No		
High luminance light source:	No				
Colour-tuneable light source:	No	Envelope:	-		
Mains or non-mains:	MLS	Connected light source (CLS):	No		
Light source cap-type (or other electric interface)	GX53 - 220-240V ~ 50/60Hz				
Lighting technology used:	LED	Non-directional or directional:	NDLS		

Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
<u> </u>	mption in on- 00 h), rounded st integer	6	Energy efficiency class	G		
dicating if it refe a sphere (360º)	s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º)	316 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700		
On-mode power (P <sub>on</sub> ), expressed in W		6,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90		
Outer dimen-	Height	195	Spectral power dis-	See image		
sions without	Width	167	tribution in the	in last page		
separate con- trol gear, light- ing control	Depth	407	range 250 nm to 800 nm, at full-load			

parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-		
		Chromaticity coordinates (x and y)	0,467 0,415		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	64	Survival factor	-		
the lumen maintenance factor	-				
Parameters for LED and OLED mains light sources:					
displacement factor (cos φ1)	0,92	Colour consistency in McAdam ellipses	5		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,0		

(a)'-': not applicable; (b)'-': not applicable;

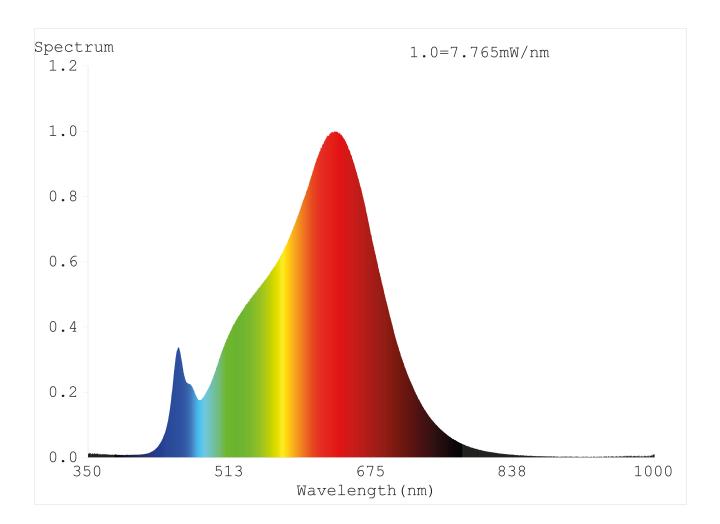

Model placed on the Union market from 01/01/2019



**EPREL registration number:** 801912 <a href="https://eprel.ec.europa.eu/qr/801912">https://eprel.ec.europa.eu/qr/801912</a>

**Supplier:** Muuto A/S (Manufacturer) **Website:** 

**Customer care service:** 

Name: Customer care Website:

Email: customercare@muuto.com Phone: +45 32 96 98 99

Address: Østergade Copenhagen Denmark