# **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

## Supplier's name or trade mark: FIAI

Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT

#### Model identifier: 111979

### Type of light source:


Lighting technology used:	LED	Non-directional or directional:	DLS		
Light source cap-type	G4				
(or other electric interface)					
Mains or non-mains:	NMLS	Connected light source (CLS):	No		
Colour-tuneable light source:	No	Envelope:	-		
High luminance light source:	No				
Anti-glare shield:	No	Dimmable:	No		
Product parameters					

Flouder parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consum mode (kWh/10 up to the neares	00 h), rounded	3	Energy efficiency class	E		
Useful luminous dicating if it refe a sphere (360°), (120°) or in a na	ers to the flux in , in a wide cone	310 in Wide cone (120°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	3 000		
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	2,7	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked st (P <sub>net</sub> ) for CLS, e and rounded to imal	•	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	9	Spectral power dis-	See image		
sions without separate con- trol gear, light- ing control	Width Depth	9 9	tribution in the range 250 nm to 800 nm, at full-load	in last page		

parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordi- nates (x and y)	0,434 0,399
Parameters for directional light s	sources:		
Peak luminous intensity (cd)	310	Beam angle in de- grees, or the range of beam angles that can be set	120
Parameters for LED and OLED lig	ht sources:		
R9 colour rendering index value	1	Survival factor	0,90
the lumen maintenance factor	0,70		

(a)'-' : not applicable;

(b)'-' : not applicable;

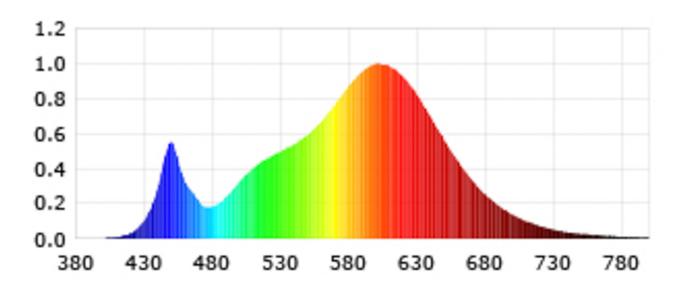

Model placed on the Union market from 07/06/2013



## **EPREL registration number:** 805540

Supplier: FIAI Handels GmbH (Manufacturer)

#### **Customer care service:**

Name: Vertrieb

Email: office@isoled.at

# Address:

Egerbach 48, 6334 Schwoich, AT

https://eprel.ec.europa.eu/qr/805540

Website: www.isoled.at

Website:

Phone: +43 5372 219999