Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: FIAI

Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT

Model identifier: 112249

Type of light source:

| Lighting technology used: | LED | Non-directional or directional: | DLS |
|-------------------------------|------|---------------------------------|---------------------------------|
| Light source cap-type | WIRE | | |
| (or other electric interface) | | | |
| Mains or non-mains: | NMLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | Yes | | |
| Anti-glare shield: | No | Dimmable: | Only with spe- cific dimmers |


Product parameters

| Parameter | | Value | Parameter | Value | | |
|----------------------------------------|---------------------------------------------------------------------------------|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--|--|
| General product parameters: | | | | | | |
| | nption in on- 00 h), rounded st integer | 10 | Energy efficiency class | F | | |
| dicating if it refe a sphere (360°) | s flux (φuse), in- ers to the flux in , in a wide cone rrow cone (90º) | 900 in Wide cone (120°) | Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set | 3 000 | | |
| On-mode pow pressed in W | ver (P _{on}), ex- | 9,6 | Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal | 0,00 | | |
| (P _{net}) for CLS, e | andby power expressed in W the second dec- | - | Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set | 83 | | |
| Outer dimen- | Height | 2 | Spectral power dis- | See image | | |
| sions without | Width | 10 | tribution in the | in last page | | |
| separate con- trol gear, light- | Depth | 2 | range 250 nm to 800 nm, at full-load | | | |

| ing control parts and non- lighting con- trol parts, if any (millime- tre) | | | | | | |
|-------------------------------------------------------------------------------------------|------|-------------------------------------------------------------------------------|----------------|--|--|--|
| Claim of equivalent power ^(a) | - | lf yes, equivalent power (W) | - | | | |
| | | Chromaticity coordi- nates (x and y) | 0,436 0,406 | | | |
| Parameters for directional light sources: | | | | | | |
| Peak luminous intensity (cd) | 900 | Beam angle in de- grees, or the range of beam angles that can be set | 120 | | | |
| Parameters for LED and OLED light sources: | | | | | | |
| R9 colour rendering index value | 1 | Survival factor | 0,90 | | | |
| the lumen maintenance factor | 0,70 | | | | | |
| (a), L, not analizable. | | | | | | |

(a)'-' : not applicable;

(b)'-' : not applicable;

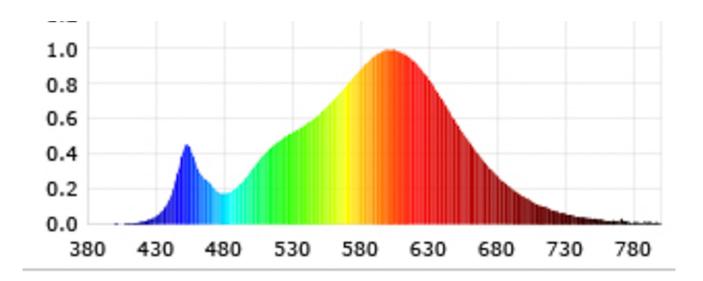

Model placed on the Union market from 09/01/2014



EPREL registration number: 805592

Supplier: FIAI Handels GmbH (Manufacturer)

Customer care service:

Name: Vertrieb

Email: office@isoled.at

Address: Egerbach 48 6334 Schwoich Austria https://eprel.ec.europa.eu/qr/805592

Website: www.isoled.at

Website: https://isoled.shop

Phone: +43 5372 219999