
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources	sources						
Supplier's name or trade mark: FIAI							
Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT							
Model identifier: 111807							
Type of light source:							
Lighting technology used:		LED	Non-directional or directional:	DLS			
Light source cap-type		G4					
(or other electric interface)							
Mains or non-mains:		NMLS	Connected light source (CLS):	No			
Colour-tuneable	e light source:	No	Envelope:	-			
High luminance	High luminance light source:						
Anti-glare shield:		No	Dimmable:	No			
Product parameters							
Parameter		Value	Parameter	Value			
General product parameters:							
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		3	Energy efficiency class	F			
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		220 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700			
On-mode power (P <sub>on</sub> ), expressed in W		2,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00			
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	82			
Outer dimen-	Height	35	Spectral power dis-	See image			
sions without	Width	35	tribution in the	in last page			
separate con- trol gear, light- ing control	Depth	48	range 250 nm to 800 nm, at full-load				

parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-		
		Chromaticity coordi-	0,465		
		nates (x and y)	0,418		
Parameters for directional light sources:					
Peak luminous intensity (cd)	220	Beam angle in degrees, or the range of beam angles that can be set	38		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	1	Survival factor	0,90		
the lumen maintenance factor	0,70				

(a)'-': not applicable; (b)'-': not applicable;

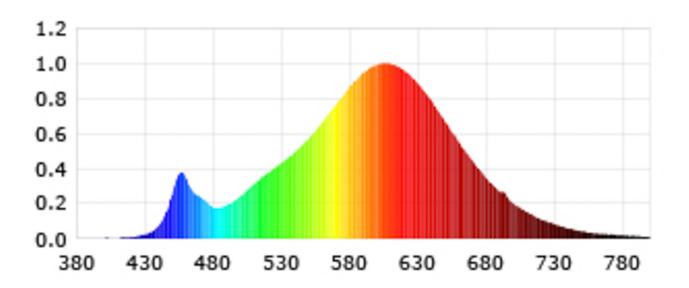

Model placed on the Union market from 18/09/2012



**EPREL registration number:** 805684 https://eprel.ec.europa.eu/qr/805684

Supplier: FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

**Customer care service:** 

Name: Vertrieb Website:

Email: office@isoled.at Phone: +43 5372 219999

Address:

Egerbach 48, 6334 Schwoich, AT