
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

| sources  |               |                            |  |              |  |  |
|--|---------------|----------------------------|--|--------------|--|--|
| Supplier's name or trade mark: FIAI  |               |                            |  |              |  |  |
| Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT   |               |                            |  |              |  |  |
| Model identifier: 112339   |               |                            |  |              |  |  |
| Type of light source:  |               |                            |  |              |  |  |
| Lighting technology used:  |               | LED                        | Non-directional or directional:  | DLS          |  |  |
| Light source cap-type  |               | GU5.3                      |  |              |  |  |
| (or other electric interface)  |               |                            |  |              |  |  |
| Mains or non-mains:  |               | NMLS                       | Connected light source (CLS):  | No           |  |  |
| Colour-tuneable light source:  |               | No                         | Envelope:  | -            |  |  |
| High luminance light source:   |               | No                         |  |              |  |  |
| Anti-glare shield:   |               | No .                       | Dimmable:  | No           |  |  |
| Product parameters   |               |                            |  |              |  |  |
| Parameter  |               | Value                      | Parameter  | Value        |  |  |
| Energy consur  | nntion in on- | General product p          | Energy efficiency  | F            |  |  |
| Energy consumption in on-<br>mode (kWh/1000 h), rounded<br>up to the nearest integer   |               | U                          | class  | 1            |  |  |
| Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) |               | 540 in Wide<br>cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700        |  |  |
| On-mode power (P <sub>on</sub> ), expressed in W   |               | 6,4                        | Standby power (P <sub>sb</sub> ),<br>expressed in W and<br>rounded to the sec-<br>ond decimal  | 0,00         |  |  |
| Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal                                |               | -                          | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 82           |  |  |
| Outer dimen-   | Height        | 50                         | Spectral power dis-  | See image    |  |  |
| sions without<br>separate con-<br>trol gear, light-<br>ing control   | Width Depth   | 50<br>56                   | tribution in the range 250 nm to 800 nm, at full-load  | in last page |  |  |

| parts and non-<br>lighting con-<br>trol parts, if<br>any (millime-<br>tre) |      |  |       |  |  |
|--|------|--|-------|--|--|
| Claim of equivalent power <sup>(a)</sup>                                   | -    | If yes, equivalent power (W)                                       | -     |  |  |
|  |      | Chromaticity coordi-   | 0,461 |  |  |
|  |      | nates (x and y)  | 0,416 |  |  |
| Parameters for directional light sources:                                  |      |  |       |  |  |
| Peak luminous intensity (cd)   | 540  | Beam angle in degrees, or the range of beam angles that can be set | 120   |  |  |
| Parameters for LED and OLED light sources:                                 |      |  |       |  |  |
| R9 colour rendering index value  | 1    | Survival factor  | 0,90  |  |  |
| the lumen maintenance factor   | 0,70 |  |       |  |  |

(a)'-': not applicable; (b)'-': not applicable;

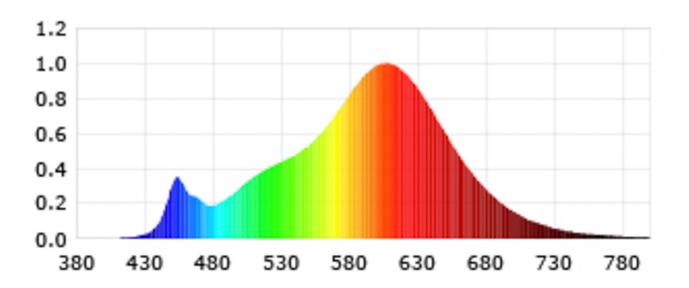

Model placed on the Union market from 07/07/2014



**EPREL registration number:** 805691 https://eprel.ec.europa.eu/qr/805691

Supplier: FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

**Customer care service:** 

Name: Vertrieb Website:

Email: office@isoled.at Phone: +43 5372 219999

Address:

Egerbach 48, 6334 Schwoich, AT