
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources						
Supplier's name or trade mark: FIAI						
Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT						
Model identifier: 112995						
Type of light so	urce:					
Lighting techno	logy used:	LED	Non-directional or directional:	DLS		
Light source cap-type		WIRE				
(or other electri	ic interface)					
Mains or non-mains:		MLS	Connected light source (CLS):	No		
Colour-tuneable	e light source:	No	Envelope:	-		
High luminance	light source:	Yes				
Anti-glare shield:		No	Dimmable:	Only with spe- cific dimmers		
Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		48	Energy efficiency class	Е		
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		4 700 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700		
On-mode power (P <sub>on</sub> ), expressed in W		48,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	12	Spectral power dis-	See image		
sions without	Width	595	tribution in the	in last page		
separate con- trol gear, light-	Depth	12	range 250 nm to 800 nm, at full-load			

ing control parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,455 0,407
Parameters for directional light	sources:		
Peak luminous intensity (cd)	4 700	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED lig	ht sources:		
R9 colour rendering index value	29	Survival factor	0,90
the lumen maintenance factor	0,70		
Parameters for LED and OLED m	ains light sources	:	
displacement factor (cos φ1)	0,90	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)'-': not applicable; (b)'-': not applicable;

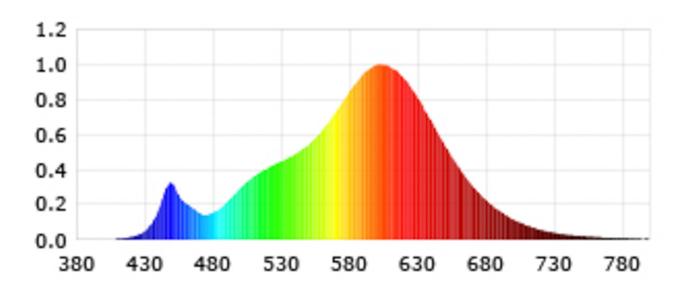

Model placed on the Union market from 25/05/2016



**EPREL registration number:** 806331 https://eprel.ec.europa.eu/qr/806331

Supplier: FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

**Customer care service:** 

Name: Vertrieb Website:

Email: office@isoled.at Phone: +43 5372 219999

Address:

Egerbach 48, 6334 Schwoich, AT