
Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources	sources						
Supplier's name or trade mark: FIAI							
Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT							
Model identifier: 112285							
Type of light source:							
Lighting technology used:		LED	Non-directional or directional:	DLS			
Light source cap-type		G53					
(or other electric interface)							
Mains or non-mains:		NMLS	Connected light source (CLS):	No			
Colour-tuneable light source:		No	Envelope:	-			
High luminance light source:		Yes					
Anti-glare shield:		No	Dimmable:	No			
Product parameters							
Parameter		Value	Parameter	Value			
General product parameters:							
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		16	Energy efficiency class	F			
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 400 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000			
On-mode power (P _{on}), expressed in W		15,7	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00			
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80			
Outer dimen-	Height	60	Spectral power dis-	See image			
sions without separate con- trol gear, light- ing control	Width Depth	60 60	tribution in the range 250 nm to 800 nm, at full-load	in last page			

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-			
		Chromaticity coordinates (x and y)	0,381 0,379			
Parameters for directional light sources:						
Peak luminous intensity (cd)	1 400	Beam angle in degrees, or the range of beam angles that can be set	75			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	1	Survival factor	0,90			
the lumen maintenance factor	0,70					

(a)'-': not applicable; (b)'-': not applicable;

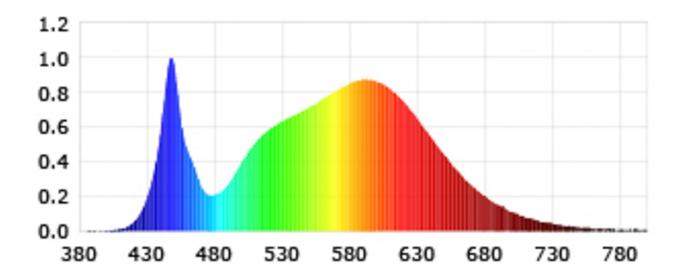

Model placed on the Union market from 21/02/2014



EPREL registration number: 806545 https://eprel.ec.europa.eu/qr/806545

Supplier: FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

Customer care service:

Name: Vertrieb Website:

Email: office@isoled.at Phone: +43 5372 219999

Address:

Egerbach 48, 6334 Schwoich, AT