## **Product Information Sheet**


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

sources							
Supplier's name or trade mark: FIAI							
Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT  Model identifier: 113746							
Lighting technol	logy used:	LED	Non-directional or directional:	NDLS			
Light source cap-type		WIRE					
(or other electric interface)							
Mains or non-mains:		MLS	Connected light source (CLS):	No			
Colour-tuneable light source:		No	Envelope:	-			
High luminance light source:		Yes					
Anti-glare shield:		No	Dimmable:	Only with spe- cific dimmers			
Product parameters							
Parameter		Value	Parameter	Value			
General product parameters:							
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		52	Energy efficiency class	D			
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		6 500 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500			
On-mode power (P <sub>on</sub> ), ex- pressed in W		52,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00			
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80			
Outer dimen-	Height	90	Spectral power dis-	See image			
sions without	Width	134	tribution in the	in last page			
separate con- trol gear, light-		90	range 250 nm to 800 nm, at full-load				

ing control parts and non- lighting con- trol parts, if any (millime- tre)							
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-			
			Chromaticity coordi-	0,315			
			nates (x and y)	0,336			
Parameters for LED and OLED light sources:							
R9 colour rendering index value		1	Survival factor	0,90			
the lumen maintenance factor		0,70					
Parameters for LED and OLED mains light sources:							
displacement factor (cos φ1)		0,90	Colour consistency in McAdam ellipses	3			
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)		0,0	Stroboscopic effect metric (SVM)	0,0			

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

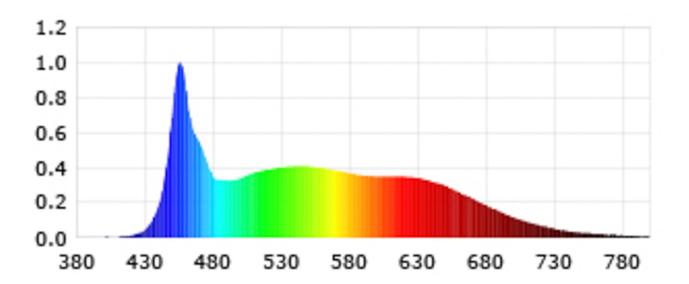

Model placed on the Union market from 01/06/2018



**EPREL registration number:** 806657 https://eprel.ec.europa.eu/qr/806657

Supplier: FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

**Customer care service:** 

Name: Vertrieb Website:

Email: office@isoled.at Phone: +43 5372 219999

Address:

Egerbach 48, 6334 Schwoich, AT