

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Occhio GmbH

**Supplier's address:** Productmanagement, Occhio GmbH Wiener Platz 7 81667 München

**Model identifier:** Mito sospeso 40 pro

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	n.a.		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	40	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	2 220 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 3 000 or 4 000
On-mode power ( $P_{on}$ ), expressed in W	40,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	95
Outer dimensions without separate control gear, light-	Height	52	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	400	
	Depth	400	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,380 0,380
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	127	Beam angle in degrees, or the range of beam angles that can be set	80
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	80	Survival factor	-
the lumen maintenance factor	-		

(a)<sup>1)</sup> : not applicable;

(b)<sup>1)</sup> : not applicable;

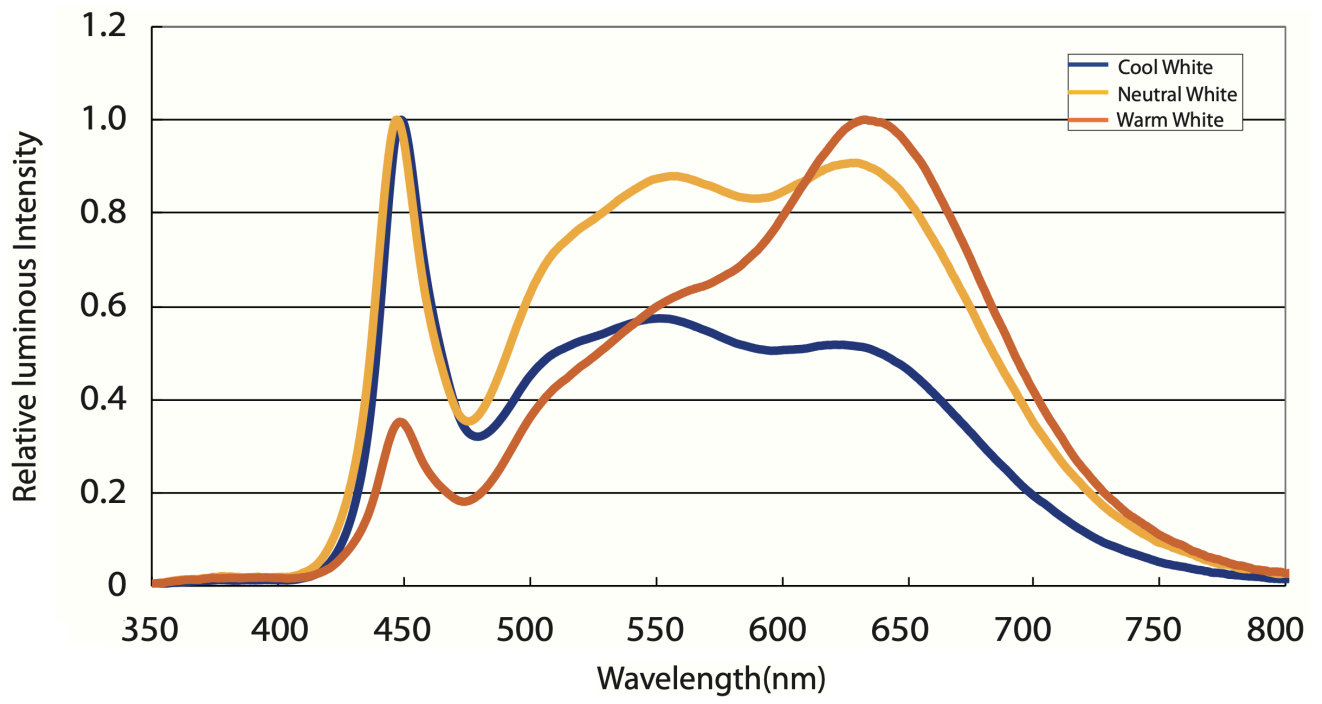

Model placed on the Union market from 01/09/2021



**EPREL registration number:** 817733

<https://eprel.ec.europa.eu/qr/817733>

**Supplier:** Occhio GmbH (Manufacturer)

**Website:**

**Customer care service:**

**Name:** Productmanagement

**Website:**

**Email:** [info@occhio.com](mailto:info@occhio.com)

**Phone:** +49 894477860

**Address:**

Occhio GmbH  
Wiener Platz 7  
81667 München