Product Information Sheet

control


ing

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources	LLLOAILD REGOI	LATION (LO) 2013/2	oto with regard to energ	gy labelling of light	
Supplier's name	e or trade mark:	FIAI			
Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT					
Model identifie	r: 115022				
Type of light so	urce:				
Lighting technology used:		LED	Non-directional or directional:	NDLS	
Light source cap-type		E27 LED			
(or other electric interface)					
Mains or non-mains:		MLS	Connected light source (CLS):	No	
Colour-tuneable light source:		No	Envelope:	-	
High luminance light source:		No			
Anti-glare shield:		No	Dimmable:	No	
		Product para	meters		
Parameter		Value	Parameter	Value	
		General product p	parameters:		
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		7	Energy efficiency class	F	
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		720 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700	
On-mode power (P _{on}), expressed in W		7,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00	
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80	
Outer dimen-	Height	140	Spectral power dis-	See image	
sions without	Width	140	tribution in the	in last page	
separate control gear, light	Depth	140	range 250 nm to 800 nm, at full-load		

parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-		
		Chromaticity coordinates (x and y)	0,455 0,407		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	1	Survival factor	0,90		
the lumen maintenance factor	0,70				
Parameters for LED and OLED m	ains light sources:				
displacement factor (cos φ1)	0,90	Colour consistency in McAdam ellipses	3		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0		

(a)'-': not applicable; (b)'-': not applicable;

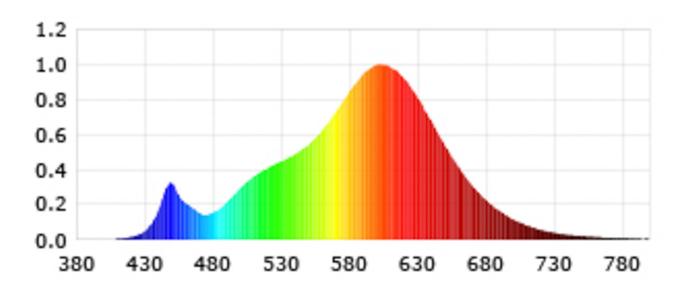

Model placed on the Union market from 20/05/2021



EPREL registration number: 820472 https://eprel.ec.europa.eu/qr/820472

Supplier: FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

Customer care service:

Name: Vertrieb Website:

Email: office@isoled.at Phone: +43 5372 219999

Address:

Egerbach 48, 6334 Schwoich, AT