# **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

### Supplier's name or trade mark: FIAI

Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT

### Model identifier: 115024

## Type of light source:


Lighting technology used:	LED	Non-directional or directional:	NDLS		
Light source cap-type	E14 LED				
(or other electric interface)					
Mains or non-mains:	MLS	Connected light source (CLS):	No		
Colour-tuneable light source:	No	Envelope:	-		
High luminance light source:	No				
Anti-glare shield:	No	Dimmable:	No		
Product parameters					

Parameter		Value	Parameter	Value		
			i di diffettei	value		
General product parameters:						
Energy consum mode (kWh/100 up to the nearest	0 h), rounded	4	Energy efficiency class	F		
Useful luminous dicating if it refer a sphere (360º), (120º) or in a nar	rs to the flux in in a wide cone	400 in Sphere (360°)	Correlated colour temperature, rounded to the near- est 100 K, or the range of correlat- ed colour temper- atures, rounded to the nearest 100 K, that can be set	2 700		
On-mode powe pressed in W	er (P <sub>on</sub> ), ex-	4,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked sta (P <sub>net</sub> ) for CLS, ex and rounded to t imal	•	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	98	Spectral power dis-	See image		
sions without separate con- trol gear, light- ing control	Width Depth	98 98	tribution in the range 250 nm to 800 nm, at full-load	in last page		

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordi- nates (x and y)	0,430 0,396			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	1	Survival factor	0,90			
the lumen maintenance factor	0,70					
Parameters for LED and OLED mains light sources:						
displacement factor (cos φ1)	0,90	Colour consistency in McAdam ellipses	3			
Claims that an LED light source replaces a fluorescent light source without integrated bal- last of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0			

(a)<sub>'-'</sub> : not applicable;

(b)'\_-' : not applicable;

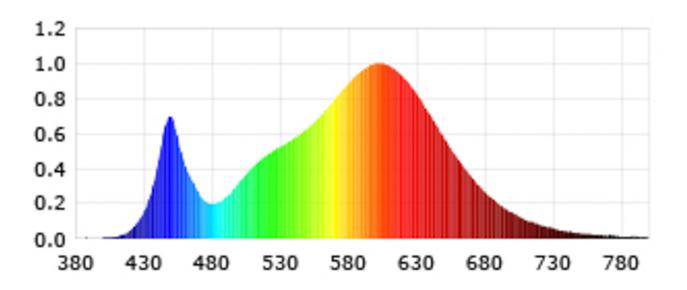

Model placed on the Union market from 20/05/2021



## **EPREL registration number:** 820474

Supplier: FIAI Handels GmbH (Manufacturer)

#### **Customer care service:**

Name: Vertrieb

Email: office@isoled.at

## Address:

Egerbach 48, 6334 Schwoich, AT

https://eprel.ec.europa.eu/qr/820474

Website: www.isoled.at

Website:

Phone: +43 5372 219999