Product Information Sheet


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

sources	ELEGATED REGUL	AHON (EU) 2019/2	015 with regard to energ	gy labelling of light		
Supplier's name	e or trade mark:	FIAI				
Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT Model identifier: 115253						
Lighting technol	logy used:	LED	Non-directional or directional:	NDLS		
Light source cap	o-type	G9				
(or other electric interface)						
Mains or non-m	ains:	MLS	Connected light source (CLS):	No		
Colour-tuneable	e light source:	No	Envelope:	-		
High luminance light source:		No				
Anti-glare shield	d:	No	Dimmable:	Only with spe- cific dimmers		
		Product para	meters			
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		5	Energy efficiency class	F		
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		470 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000		
On-mode power (P _{on}), expressed in W		4,8	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	16	Spectral power dis-	See image		
sions without	Width	16	tribution in the	in last page		
separate con- trol gear, light-	Depth	56	range 250 nm to 800 nm, at full-load			

ing control parts and non- lighting con- trol parts, if any (millime- tre)					
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-		
		Chromaticity coordi-	0,430		
		nates (x and y)	0,396		
Parameters for LED and OLED light sources:					
R9 colour rendering index value	1	Survival factor	0,90		
the lumen maintenance factor	0,70				
Parameters for LED and OLED mains light sources:					
displacement factor (cos φ1)	0,90	Colour consistency in McAdam ellipses	3		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0		

(a)_{'-'} : not applicable;

(b)_{'-'} : not applicable;

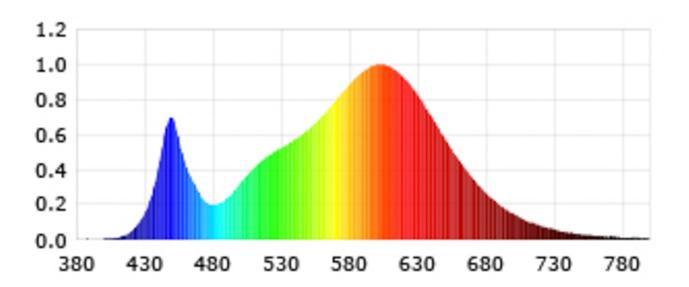

Model placed on the Union market from 15/06/2021



EPREL registration number: 824571 https://eprel.ec.europa.eu/qr/824571

Supplier: FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

Customer care service:

Name: Vertrieb Website:

Email: office@isoled.at Phone: +43 5372 219999

Address:

Egerbach 48, 6334 Schwoich, AT