

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L022935430

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	240 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	4,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	48	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	35	
	Depth	35	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,432 0,406
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	500	Beam angle in degrees, or the range of beam angles that can be set	35
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	5	Survival factor	0,70
the lumen maintenance factor	0,70		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,70	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. <sup>(b)</sup>	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,7	Stroboscopic effect metric (SVM)	0,9

(a)'.': not applicable;

(b)'.': not applicable;


### SPL Spectrum Test Report

Sample :	Date :	2021-07-22 16:01:48
Specification : L022935430	Sam. Status :	
Sample No. : 2	Instrument :	HaasSuite(EVERFINE)
Manufacturer : Renee	Test by :	Renee
	Assessor :	damin

#### Test Condition

Temperature : 25.3Deg	RH : 65.0%
WL Range : 380nm-780nm	IP : 47761 (73%)
Test Mode : Fast Test	T : 69 ms
	Sensitivity : High

#### Spectrum

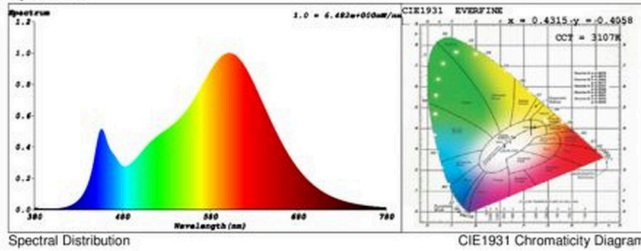

#### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4315$   $y = 0.4058$  /  $u' = 0.2464$   $v' = 0.5213$  ( $duv = 1.47e-03$ )  
 CCT= 3107K Prcp WL: Ld=581.8nm Purity=51.3%  
 Peak WL: Lp=602nm FWHM: =127.1nm Ratio:R=22.2% G=74.7% B=3.1%

Render Index: Ra = 82.4

R1 =81 R2 =93 R3 =94 R4 =79 R5 =82 R6 =92 R7 =81  
 R8 =58 R9 =5 R10=84 R11=78 R12=73 R13=84 R14=97 R15=73  
 LEVEL:OUT WHITE:ANSI\_3000K


#### Photometric & Radiometric Parameters

Flux = 320.87 lm Eff. : 132.50 lm/W Fe = 968.16 mW

#### Electrical parameters

V = 229.8 V I = 0.01449 A P = 2.422 W PF = 0.7274

Model placed on the Union market from 01/09/2021



**EPREL registration number:** 831198

<https://eprel.ec.europa.eu/qr/831198>

**Supplier:** Schiefer Signaal Speciaallampen B.V. (Importer)

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Customer care service:**

**Name:** Schiefer Lighting

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Email:** [info@schiefer.nl](mailto:info@schiefer.nl)

**Phone:** +31765037717

**Address:**

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands