

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

Model identifier: L142404922

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	170 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 200
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load	
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,517
Parameters for LED and OLED light sources:			
R9 colour rendering index value	75	Survival factor	0,96
the lumen maintenance factor	0,96		

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample : Date : 2020-05-04 10:32:29
 Specification : L142404922 sample test 02 Sam. Status :
 Sample No. : L142404922 sample test 02 AC 173Lm Instrument : HaasSuite(EVERFINE)
 Manufacturer : Test by : Schiefer
 Assessor : damin

Test Condition

Temperature : 25.3Deg RH : 65.0%
 WL Range : 380nm-780nm IP : 52116 (80%)
 Test Mode : Fast Test T : 95 ms
 Sensitivity : High

Spectrum

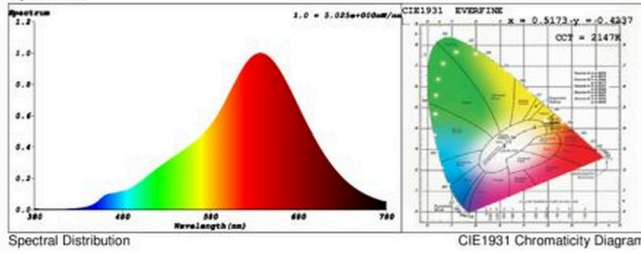

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.5173$ $y = 0.4237$ / $u' = 0.2935$ $v' = 0.5409$ ($duv=2.77e-03$)
 CCT= 2147K Prcp WL: Ld=586.9nm Purity=82.5%
 Peak WL: Lp=637nm FWHM: =119.9nm Ratio:R=32.8% G=65.6% B=1.7%

Render Index: Ra = 96.0

R1 =98 R2 =99 R3 =98 R4 =96 R5 =98 R6 =97 R7 =94
 R8 =88 R9 =75 R10=97 R11=96 R12=94 R13=98 R14=98 R15=93
 LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 173.62 lm Eff. : 40.14 lm/W $F_e = 718.01$ mW

Electrical parameters

V = 24.04 V I = 0.1903 A P = 4.325 W PF = 0.9450

Schiefer Professional Lighting
www.spl-lighting.com