

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

Model identifier: L149115927

Type of light source:

| | | | |
|---|-----|---------------------------------|----------------------------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E14 | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Only with specific dimmers |

Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|

General product parameters:

| | | | |
|--|----------------------|--|------------------------|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 2 | Energy efficiency class | G |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 160 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 |
| On-mode power (P_{on}), expressed in W | 2,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 82 |
| Outer dimensions | Height | Spectral power distribution in the | See image in last page |
| | Width | | |
| | | | 35 |

| | | | | |
|---|-------|------|---------------------------------------|-------|
| without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre) | Depth | 35 | range 250 nm to 800 nm, at full-load | |
| Claim of equivalent power ^(a) | | - | If yes, equivalent power (W) | - |
| | | | Chromaticity coordinates (x and y) | 0,467 |
| Parameters for LED and OLED light sources: | | | | |
| R9 colour rendering index value | | 33 | Survival factor | 0,96 |
| the lumen maintenance factor | | 0,96 | | |
| Parameters for LED and OLED mains light sources: | | | | |
| displacement factor (cos ϕ_1) | | 0,80 | Colour consistency in McAdam ellipses | 6 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | | -(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | | 0,1 | Stroboscopic effect metric (SVM) | 0,3 |

(a)-: not applicable;

(b)-: not applicable;


SPL Spectrum Test Report

| | | | | |
|---------------|---|-------------|---|---------------------|
| Sample | : | Date | : | 2021-04-22 13:54:39 |
| Specification | : | Sam. Status | : | |
| Sample No. | : | Instrument | : | HaasSuite(EVERFINE) |
| Manufacturer | : | Test by | : | Schiefer |
| | | Assessor | : | damin |

Test Condition

| | | | | | |
|-------------|---|-------------|-------------|---|-------------|
| Temperature | : | 25.3Deg | RH | : | 65.0% |
| WL Range | : | 380nm-780nm | IP | : | 54797 (84%) |
| Test Mode | : | Fast Test | T | : | 143 ms |
| | | | Sensitivity | : | High |

Spectrum

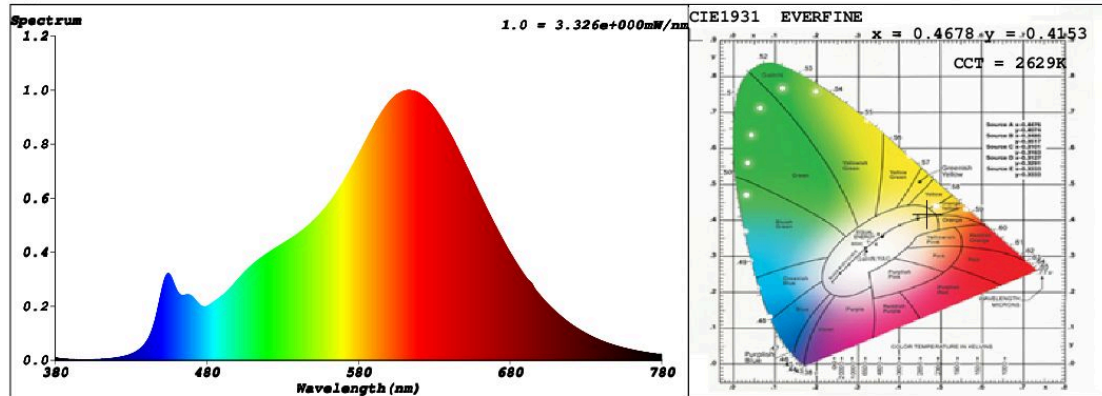

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4678$ $y = 0.4153$ / $u' = 0.2655$ $v' = 0.5303$ ($duv=1.11e-03$)

CCT= 2629K Prcp WL: Ld=584.2nm Purity=65.1%

Peak WL: Lp=614nm FWHM: =123.3nm Ratio:R=26.6% G=70.9% B=2.5%

Render Index: Ra = 88.1

R1 =88 R2 =96 R3 =95 R4 =87 R5 =89 R6 =97 R7 =85

R8 =68 R9 =33 R10=92 R11=89 R12=84 R13=90 R14=98 R15=81

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 149.00 lm Eff. : 81.13 lm/W Fe = 492.27 mW

Electrical parameters

V = 230.1 V I = 0.009386 A P = 1.837 W PF = 0.8505

Schiefer Professional Lighting

www.spl-lighting.com