

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

**Model identifier:** L149135019

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	1 900
On-mode power ( $P_{on}$ ), expressed in W	4,5	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions	Height	Spectral power distribution in the	See image in last page
	Width		
			35

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	35	range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,523
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value		-10	Survival factor	0,90
the lumen maintenance factor		0,93		
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )		0,85	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,9	Stroboscopic effect metric (SVM)	0,4

(a) '-': not applicable;

(b) '-': not applicable;


## SPL Spectrum Test Report

Sample	:	Date	: 2019-08-16 14:37:03
Specification	: L149135019	Sam. Status	:
Sample No.	: L149135019 01	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 51036 (78%)
Test Mode	: Fast Test	T	: 54 ms
		Sensitivity	: High

### Spectrum

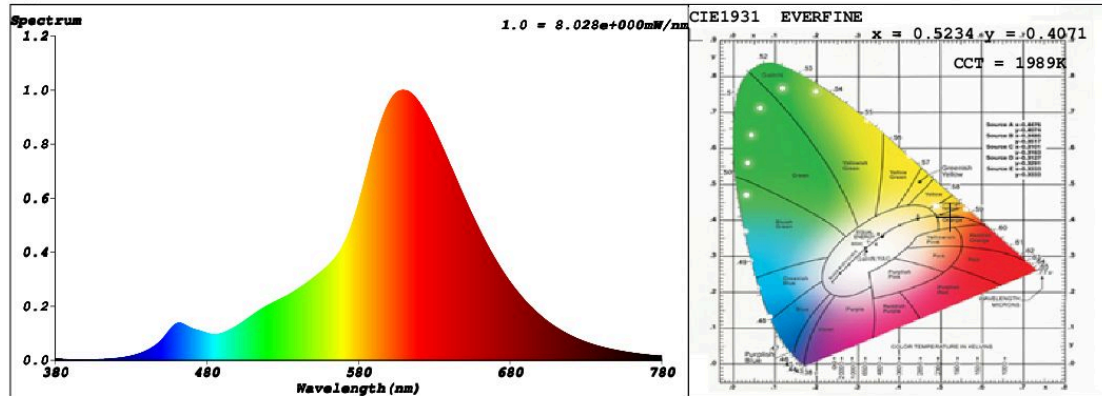

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.5234$   $y = 0.4071$  /  $u' = 0.3061$   $v' = 0.5358$  ( $duv = -1.95e-03$ )

CCT= 1989K Prcp WL:  $L_d = 589.6nm$  Purity=79.3%

Peak WL:  $L_p = 609nm$  FWHM:  $\approx 83.0nm$  Ratio: R=34.0% G=64.4% B=1.5%

Render Index:  $R_a = 78.0$

R1 =79 R2 =96 R3 =85 R4 =76 R5 =81 R6 =95 R7 =70

R8 =42 R9 =-10 R10=92 R11=79 R12=90 R13=84 R14=93 R15=67

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 267.69 lm Eff. : 57.99 lm/W Fe = 892.71 mW

### Electrical parameters

V = 229.9 V I = 0.02255 A P = 4.616 W PF = 0.8906

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)