

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

**Model identifier:** L276081001

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	11	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	810 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2200...2700
On-mode power ( $P_{on}$ ), expressed in W	11,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	97
Outer dimensions	Height	Spectral power distribution in the	See image in last page
	Width		
			60

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	60	range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,460
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value		91	Survival factor	0,70
the lumen maintenance factor		0,70		
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )		0,95	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		1,0	Stroboscopic effect metric (SVM)	0,9

(a) '-': not applicable;

(b) '-': not applicable;

## SPL Spectrum Test Report

Sample : 1  
 Specification :  
 Sample No. : L276081001-2  
 Manufacturer :


Date : 2017-02-20 11:23:12  
 Sam. Status :  
 Instrument : HaasSuite(EVERFINE)  
 Test by : Schiefer  
 Assessor : damin

### Test Condition

Temperature : 25.3Deg  
 WL Range : 380nm-780nm  
 Test Mode : Fast Test

RH : 65.0%  
 IP : 47723 (73%)  
 T : 19 ms  
 Sensitivity : High

### Spectrum

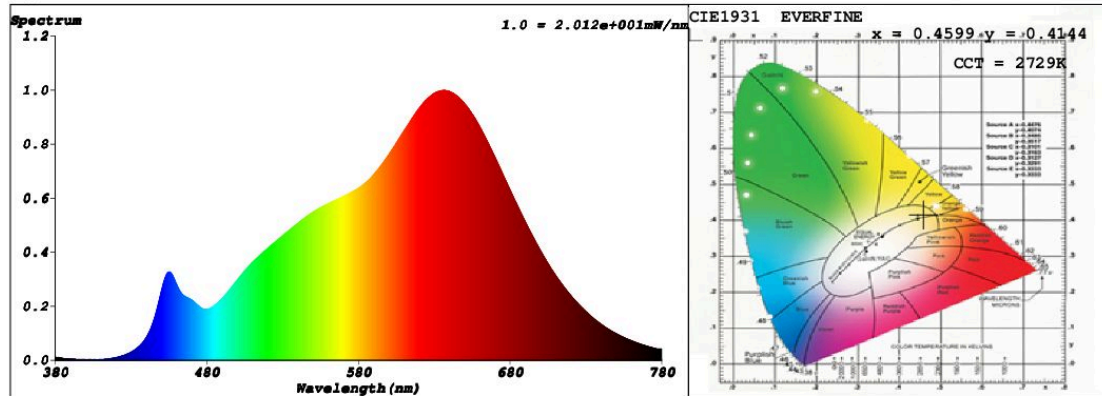

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4599$   $y = 0.4144$  /  $u' = 0.2608$   $v' = 0.5288$  ( $duv=1.39e-03$ )

CCT= 2729K Prcp WL:  $L_d=583.6nm$  Purity=62.4%

Peak WL:  $L_p=636nm$  FWHM: =153.0nm Ratio:R=26.8% G=70.6% B=2.6%

Render Index:  $R_a = 98.2$

R1 =100 R2 =99 R3 =96 R4 =99 R5 =99 R6 =99 R7 =98

R8 =96 R9 =91 R10=96 R11=99 R12=85 R13=100 R14=97 R15=98

LEVEL:OUT WHITE:ANSI\_2700K

### Photometric & Radiometric Parameters

Flux = 859.12 lm Eff. : 80.57 lm/W  $F_e = 3.2622 W$

### Electrical parameters

V = 230.1 V I = 0.05069 A P = 10.66 W PF = 0.9142

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)