

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L276410922

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	810 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 000
On-mode power (P_{on}), expressed in W	10,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	140	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	64	
	Depth	64	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,520 0,415
Parameters for LED and OLED light sources:			
R9 colour rendering index value	5	Survival factor	0,96
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,85	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2018-11-30 10:03:17
Specification	: L276410922	Sam. Status	:
Sample No.	: L276410922 1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	: Tenia	Test by	:
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 45756 (70%)
Test Mode	: Fast Test	T	: 17 ms
		Sensitivity	: High

Spectrum

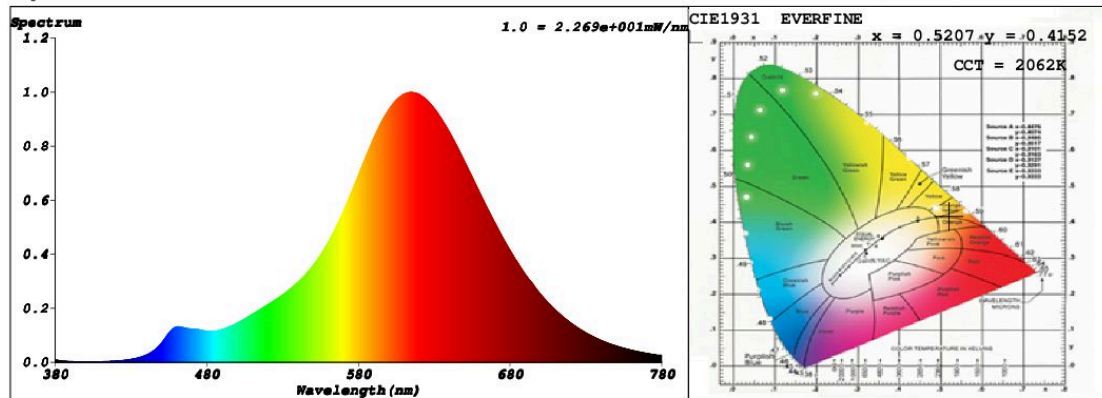

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.5207$ $y = 0.4152$ / $u' = 0.3001$ $v' = 0.5384$ ($duv=3.16e-04$)

CCT= 2062K Prcp WL: $L_d=588.3nm$ Purity=80.9%

Peak WL: $L_p=615nm$ FWHM: =106.5nm Ratio:R=32.1% G=66.4% B=1.5%

Render Index: $R_a = 79.3$

R1 =78 R2 =93 R3 =90 R4 =74 R5 =78 R6 =94 R7 =76

R8 =51 R9 =5 R10=86 R11=73 R12=85 R13=81 R14=95 R15=70

LEVEL:OUT WHITE:OUT

Photometric & Radiometric Parameters

Flux = 841.11 lm Eff. : 84.49 lm/W $F_e = 2.9239$ W

Electrical parameters

V = 219.9 V I = 0.04801 A P = 9.955 W PF = 0.9430

Schiefer Professional Lighting

www.professional-lighting.eu