

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L277225001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2200...2700
On-mode power (P_{on}), expressed in W	4,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	97
Outer dimensions without separate control gear, light-	Height	73	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	45	
	Depth	45	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,467 0,417
Parameters for LED and OLED light sources:			
R9 colour rendering index value	85	Survival factor	0,70
the lumen maintenance factor	0,70		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,75	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9

(a): not applicable;

(b): not applicable;

SPL Spectrum Test Report

Sample : 1
 Specification :
 Sample No. : L277225001-2
 Manufacturer :


Date : 2017-02-20 11:36:50
 Sam. Status :
 Instrument : HaasSuite(EVERFINE)
 Test by : Schiefer
 Assessor : damin

Test Condition

Temperature : 25.3Deg
 WL Range : 380nm-780nm
 Test Mode : Fast Test

RH : 65.0%
 IP : 50853 (78%)
 T : 56 ms
 Sensitivity : High

Spectrum

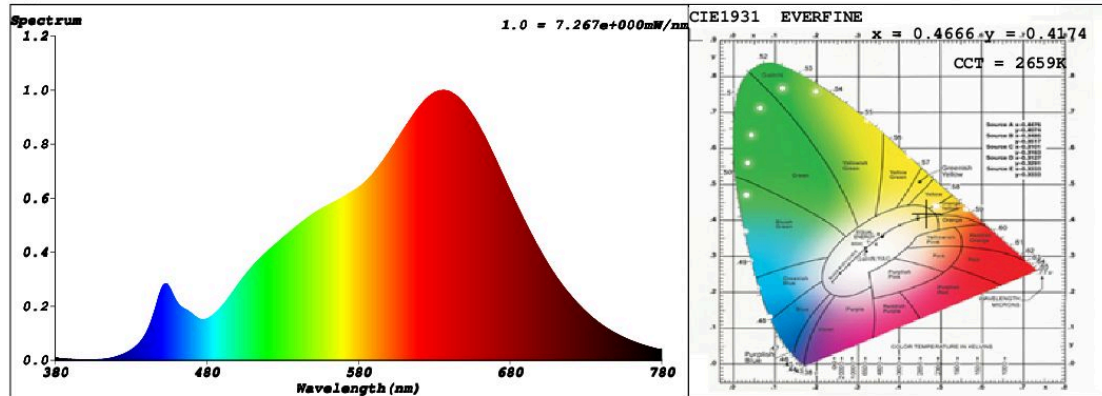

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4666$ $y = 0.4174$ / $u' = 0.2638$ $v' = 0.5309$ ($duv=1.92e-03$)

CCT= 2659K Prcp WL: $L_d=583.8nm$ Purity=65.4%

Peak WL: $L_p=635nm$ FWHM: =151.1nm Ratio:R=27.2% G=70.6% B=2.3%

Render Index: $R_a = 97.1$

R1 =98 R2 =98 R3 =94 R4 =99 R5 =97 R6 =97 R7 =98

R8 =95 R9 =85 R10=92 R11=99 R12=85 R13=98 R14=96 R15=96

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 307.73 lm Eff. : 70.24 lm/W $F_e = 1.1628 W$

Electrical parameters

V = 230.1 V I = 0.02659 A P = 4.381 W PF = 0.7159

Schiefer Professional Lighting

www.professional-lighting.eu