

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

**Model identifier:** L277239930

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	250 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	3,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,444
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	4	Survival factor	0,90
the lumen maintenance factor	0,93		

(a): not applicable;

(b): not applicable;


## SPL Spectrum Test Report

Sample	: 5-5	Date	: 2019-01-03 11:11:29
Specification	:	Sam. Status	:
Sample No.	: L277239930-1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	:
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 52220 (80%)
Test Mode	: Fast Test	T	: 74 ms
		Sensitivity	: High

### Spectrum

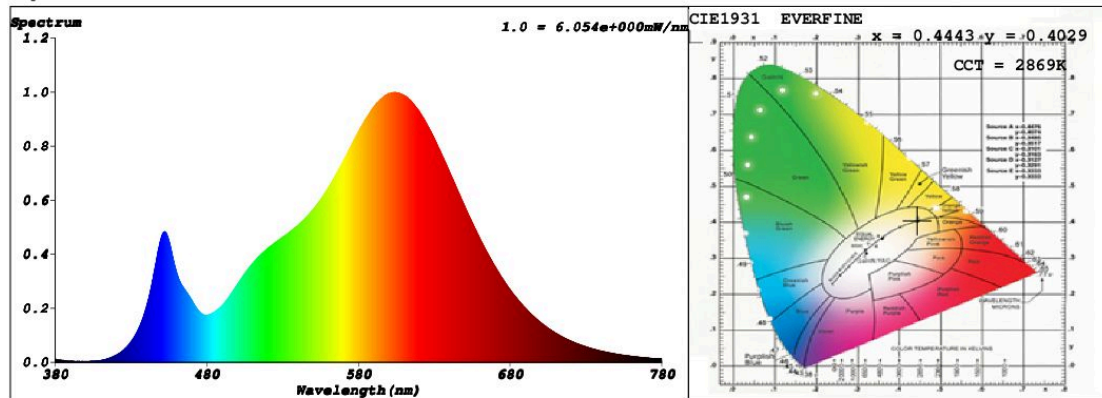

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4443$   $y = 0.4029$  /  $u' = 0.2559$   $v' = 0.5220$  ( $duv = -1.41e-03$ )

CCT= 2869K Prcp WL: Ld=583.9nm Purity=54.3%

Peak WL: Lp=604nm FWHM: =118.3nm Ratio:R=23.8% G=73.8% B=2.4%

Render Index: Ra = 81.8

R1 =80 R2 =91 R3 =95 R4 =79 R5 =81 R6 =90 R7 =81

R8 =56 R9 =4 R10=81 R11=78 R12=74 R13=83 R14=98 R15=73

LEVEL:OUT WHITE:ANSI\_3000K

### Photometric & Radiometric Parameters

Flux = 285.19 lm Eff. : 0.00 lm/W Fe = 870.72 mW

### Electrical parameters

V = 0 V I = 0 A P = 0 W PF = 0

**Schiefer Professional Lighting**

www.professional-lighting.eu