

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

**Model identifier:** L419979927-1

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	S14s		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:


Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	550 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	9,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions	Height	Spectral power distribution in the	See image in last page
	Width		

without separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)	Depth	30	range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,459
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value		11	Survival factor	0,90
the lumen maintenance factor		0,70		
<b>Parameters for LED and OLED mains light sources:</b>				
displacement factor (cos $\phi_1$ )		0,90	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		1,0	Stroboscopic effect metric (SVM)	0,4

(a)-: not applicable;

(b)-: not applicable;

**Light Source Test Report**

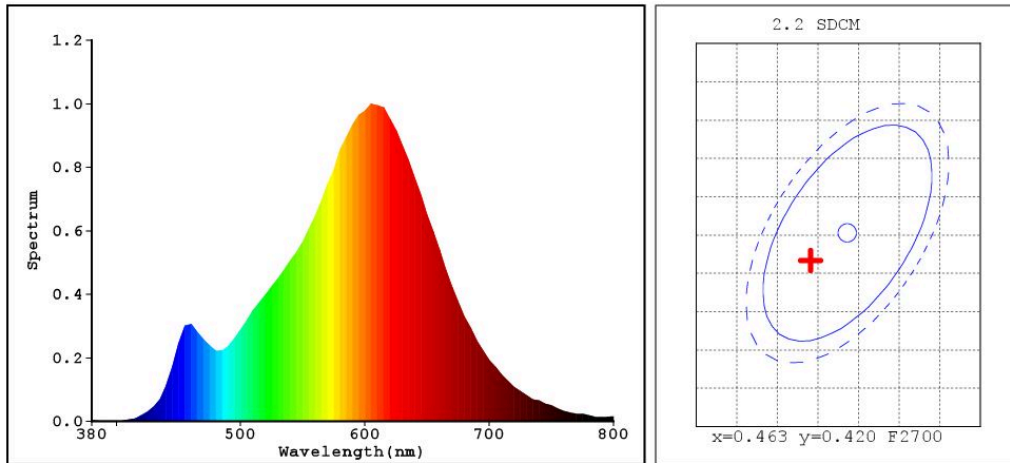

**Color Parameters:**

Chromaticity Coordinate: x=0.4591 y=0.4171  
 Chromaticity Coordinate: u'=0.2591 v'=0.5297 (duv=2.46e-03)  
 Tc=2761K Dominant WL:Ld=583.1nm Purity=63.0% Centroid WL:597.0nm  
 Ratio:R=26.3% G=71.5% B=2.2% Peak WL:Lp=605.0nm HWL:124.1nm  
 Render Index:Ra=82.8  
 R1 =81 R2 =92 R3 =95 R4 =79 R5 =81 R6 =91 R7 =83  
 R8 =59 R9 =11 R10=82 R11=78 R12=74 R13=84 R14=98 R15=73

**Photo Parameters:**

Flux: 548.87 lm Fe: 1.5878 W Efficacy: 60.86 lm/W

**Electrical Parameters:**

Lamp : U=230.8V I=0.04075A P=9.019W PF=0.9590

*Instrument Status:*

Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=1368 (G=4,D=51)  
 REF=12573 (R=3) %=0.185% PMT: 26.3 centigrade [150.0]

Product Type:L419979927-1  
 Number:2  
 Temperature:25.3 deg  
 Test Operator:  
 Software:V2.00.129

Manufacturer:LUMARTEC  
 Test Department:LUMARTEC  
 Humidity:65.0%  
 Test Date:2018-05-10 13:46:22  
 Instrument:PMS-80\_V1 (SN:G107113CA8321121)