

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L571235927

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	G53		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	650 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	12,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	92
Outer dimensions without separate control gear, light-	Height	67	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	111	
	Depth	111	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,458 0,412
Parameters for directional light sources:			
Peak luminous intensity (cd)	1 600	Beam angle in degrees, or the range of beam angles that can be set	35
Parameters for LED and OLED light sources:			
R9 colour rendering index value	89	Survival factor	1,00
the lumen maintenance factor	0,75		

(a) : not applicable;

(b) : not applicable;


SPL Spectrum Test Report

Sample	:	Date	: 2021-07-19 12:14:59
Specification	: L571235927	Sam. Status	:
Sample No.	: 1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Renee
		Assessor	: damin

Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 52772 (81%)
Test Mode	: Fast Test	T	: 33 ms
		Sensitivity	: High

Spectrum

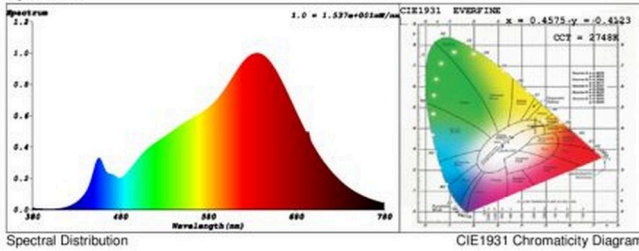

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4575$ $y = 0.4123$ / $u' = 0.2602$ $v' = 0.5276$ ($duv=8.49e-04$)
 CCT= 2748K Prcp WL: Ld=583.7nm Purity=61.1%
 Peak WL: Lp=635nm FWHM: =152.1nm Ratio:R=26.8% G=70.5% B=2.7%

Render Index: Ra = 98.3

R1 =99 R2 =100 R3 =98 R4 =99 R5 =99 R6 =98 R7 =98
 R8 =96 R9 =89 R10=98 R11=97 R12=89 R13=99 R14=98 R15=98
 LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 665.01 lm Eff. : 82.35 lm/W $F_e = 2.5260$ W

Electrical parameters

V = 11.89 V I = 0.7311 A P = 8.075 W PF = 0.9290