

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** L571535900

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	G53		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	15	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	610 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2000...3000
On-mode power ( $P_{on}$ ), expressed in W	15,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	95
Outer dimensions without separate control gear, light-	Height	47	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	111	
	Depth	111	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,439 0,404
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	1 800	Beam angle in degrees, or the range of beam angles that can be set	35
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	81	Survival factor	1,00
the lumen maintenance factor	0,72		

(a) : not applicable;

(b) : not applicable;


**SPL Spectrum Test Report**

Sample :	Date :	2021-07-19 13:33:56
Specification : L571535900	Sam. Status :	
Sample No. :	Instrument :	HaasSuite(EVERFINE)
Manufacturer :	Test by :	Renee
	Assessor :	damin

**Test Condition**

Temperature :	25.3Deg	RH :	65.0%
WL Range :	380nm-780nm	IP :	51561 (79%)
Test Mode :	Fast Test	T :	44 ms
		Sensitivity :	High

**Spectrum**

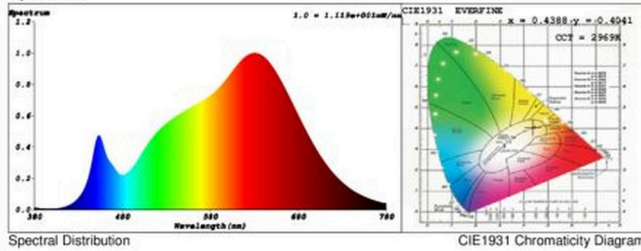

**Colorimetric Parameters**

Chromaticity Coordinate:  $x = 0.4388$   $y = 0.4041$  /  $u' = 0.2518$   $v' = 0.5217$  ( $duv = -2.60e-04$ )  
 CCT= 2969K Prcp WL: Ld=583.0nm Purity=53.0%  
 Peak WL: Lp=630nm FWHM: =168.6nm Ratio:R=24.9% G=72.3% B=2.8%

Render Index: Ra = 96.1

R1 =97 R2 =98 R3 =96 R4 =97 R5 =96 R6 =96 R7 =97  
 R8 =92 R9 =81 R10=92 R11=97 R12=82 R13=98 R14=96 R15=95  
 LEVEL:OUT WHITE:ANSI\_3000K

**Photometric & Radiometric Parameters**

Flux = 536.16 lm Eff. : 57.53 lm/W  $F_e = 1.9581$  W

**Electrical parameters**

V = 11.87 V I = 0.8441 A P = 9.319 W PF = 0.9304