

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L642761927

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	350 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	5,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	53	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	50	
	Depth	50	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,467 0,419
Parameters for directional light sources:			
Peak luminous intensity (cd)	650	Beam angle in degrees, or the range of beam angles that can be set	38
Parameters for LED and OLED light sources:			
R9 colour rendering index value	59	Survival factor	0,90
the lumen maintenance factor	0,97		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,80	Colour consistency in McAdam ellipses	4
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,4

(a)'.': not applicable;

(b)'.': not applicable;


SPL Spectrum Test Report

Sample	:	Date	:	2021-07-01 10:46:49
Specification	:	Sam. Status	:	
Sample No.	:	Instrument	:	HaasSuite(EVERFINE)
Manufacturer	:	Test by	:	Renee
		Assessor	:	damin

Test Condition

Temperature	:	25.3Deg	RH	:	65.0%
WL Range	:	380nm-780nm	IP	:	48747 (74%)
Test Mode	:	Fast Test	T	:	47 ms
			Sensitivity	:	High

Spectrum

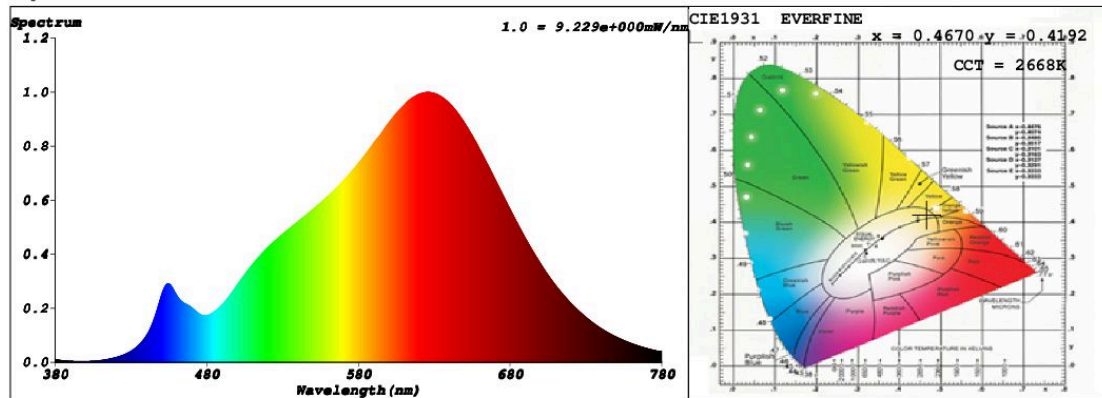

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4670$ $y = 0.4192$ / $u' = 0.2632$ $v' = 0.5316$ ($duv=2.54e-03$)

CCT= 2668K Prcp WL: $L_d=583.6nm$ Purity=66.0%

Peak WL: $L_p=626nm$ FWHM: $=150.9nm$ Ratio:R=26.5% G=71.3% B=2.2%

Render Index: $R_a = 92.5$

R1 =92 R2 =96 R3 =98 R4 =93 R5 =92 R6 =95 R7 =93

R8 =82 R9 =59 R10=89 R11=93 R12=81 R13=93 R14=98 R15=88

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 422.23 lm Eff. : 75.39 lm/W $F_e = 1.5062 W$

Electrical parameters

V = 229.8 V I = 0.02929 A P = 5.601 W PF = 0.8320

Schiefer Professional Lighting

www.spl-lighting.com