

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** LF024031501

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba15d		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	140 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power ( $P_{on}$ ), expressed in W	1,5	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	75	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	45	
	Depth	45	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,477 0,405
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	66	Survival factor	0,96
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,80	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


## SPL Spectrum Test Report

Sample	:	Date	: 2019-07-23 11:07:03
Specification	:	Sam. Status	:
Sample No.	: LF024031501-1	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	: Schiefer
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 52969 (81%)
Test Mode	: Fast Test	T	: 173 ms
		Sensitivity	: High

### Spectrum

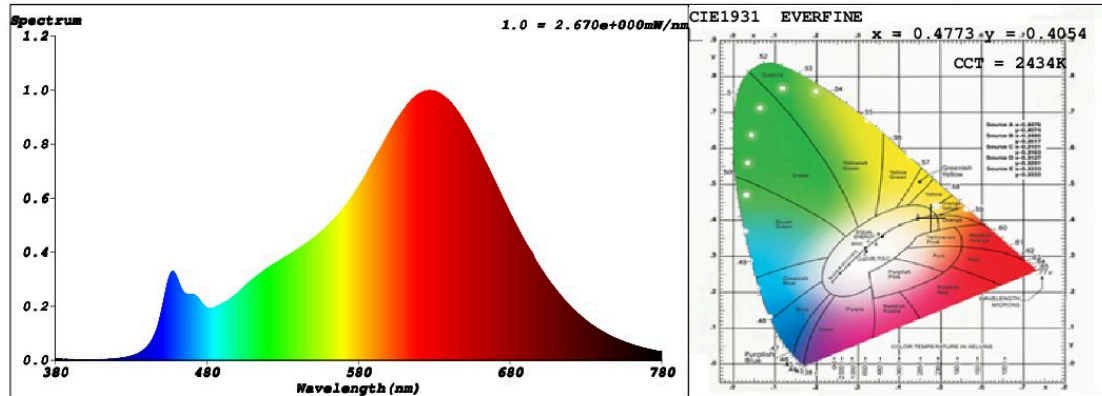

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4773$   $y = 0.4054$  /  $u' = 0.2763$   $v' = 0.5280$  ( $duv = -2.90e-03$ )

CCT= 2434K Prcp WL:  $L_d = 586.6\text{nm}$  Purity=65.0%

Peak WL:  $L_p = 627\text{nm}$  FWHM:  $=124.3\text{nm}$  Ratio: R=29.6% G=67.9% B=2.6%

Render Index:  $R_a = 93.0$

R1 =97 R2 =98 R3 =94 R4 =95 R5 =98 R6 =92 R7 =89

R8 =82 R9 =66 R10=96 R11=98 R12=84 R13=99 R14=98 R15=92

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 107.54 lm Eff. : 68.09 lm/W  $F_e = 403.07\text{ mW}$

### Electrical parameters

V = 229.9 V I = 0.008265 A P = 1.579 W PF = 0.8310

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)