

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** LF024070501

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Ba22d		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	6	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	400 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 500
On-mode power ( $P_{on}$ ), expressed in W	5,5	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	105	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	60	
	Depth	60	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,481 0,407
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	55	Survival factor	0,96
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


## SPL Spectrum Test Report

Sample	: 5-5	Date	: 2018-01-10 11:53:40
Specification	: LF024070501	Sam. Status	:
Sample No.	: LF024070501 03	Instrument	: HaasSuite(EVERFINE)
Manufacturer	: SPL	Test by	:
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 52028 (79%)
Test Mode	: Fast Test	T	: 40 ms
		Sensitivity	: High

### Spectrum

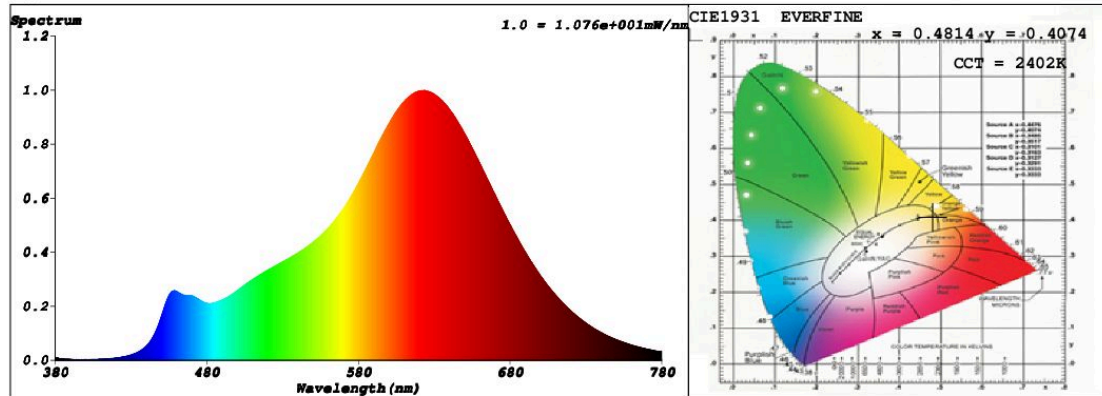

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4814$   $y = 0.4074$  /  $u' = 0.2780$   $v' = 0.5294$  ( $duv = -2.33e-03$ )

CCT= 2402K Prcp WL: Ld=586.6nm Purity=66.8%

Peak WL: Lp=624nm FWHM: =118.8nm Ratio:R=29.7% G=67.7% B=2.6%

Render Index: Ra = 91.0

R1 =95 R2 =98 R3 =92 R4 =93 R5 =97 R6 =92 R7 =86

R8 =76 R9 =55 R10=96 R11=96 R12=84 R13=98 R14=96 R15=89

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 433.46 lm Eff. : 77.51 lm/W Fe = 1.5894 W


### Electrical parameters

V = 230.1 V I = 0.02800 A P = 5.593 W PF = 0.8681

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)

Model placed on the Union market from 01/09/2021



**EPREL registration number:** 831900

<https://eprel.ec.europa.eu/qr/831900>

**Supplier:** Schiefer Signaal Speciaallampen B.V. (Importer)

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Customer care service:**

**Name:** Schiefer Lighting

**Website:** [www.schiefer.nl](http://www.schiefer.nl)

**Email:** [info@schiefer.nl](mailto:info@schiefer.nl)

**Phone:** +31765037717

**Address:**

Potterbakkerstraat 35

4871EP Etten-Leur

Netherlands