

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

**Model identifier:** LV023826321

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	100 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	1 900
On-mode power ( $P_{on}$ ), expressed in W	1,5	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, light-	Height	56	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	26	
	Depth	26	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,538 0,404
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	18	Survival factor	0,96
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,3

(a): not applicable;

(b): not applicable;


## SPL Spectrum Test Report

Sample	:	Date	: 2017-11-15 15:17:10
Specification	: LF023826321	Sam. Status	:
Sample No.	: LF023826321 02	Instrument	: HaasSuite(EVERFINE)
Manufacturer	:	Test by	:
		Assessor	: damin

### Test Condition

Temperature	: 25.3Deg	RH	: 65.0%
WL Range	: 380nm-780nm	IP	: 55312 (84%)
Test Mode	: Fast Test	T	: 198 ms
		Sensitivity	: High

### Spectrum

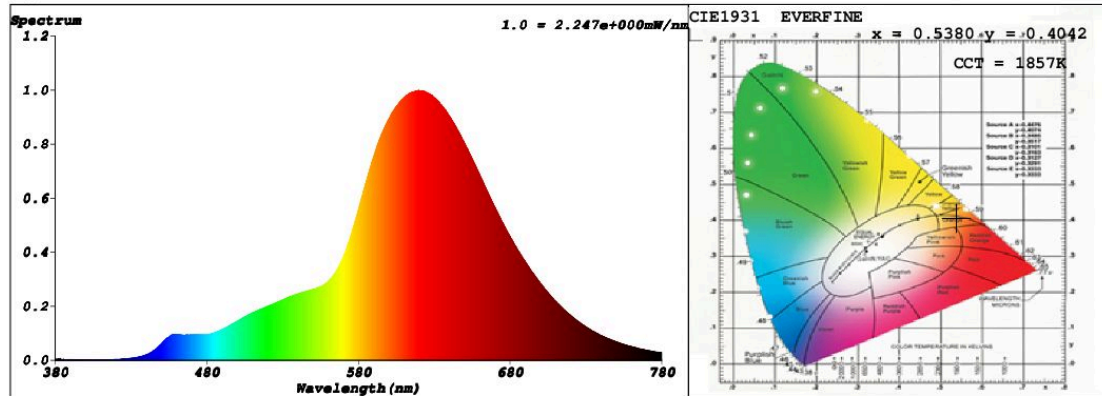

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.5380$   $y = 0.4042$  /  $u' = 0.3177$   $v' = 0.5370$  ( $duv = -1.93e-03$ )

CCT= 1857K Prcp WL:  $L_d = 590.9nm$  Purity=82.8%

Peak WL:  $L_p = 620nm$  FWHM: =99.2nm Ratio:R=36.9% G=61.6% B=1.5%

Render Index:  $R_a = 82.7$

R1 =86 R2 =99 R3 =83 R4 =85 R5 =90 R6 =88 R7 =75

R8 =55 R9 =18 R10=97 R11=93 R12=78 R13=91 R14=92 R15=74

LEVEL:OUT WHITE:OUT

### Photometric & Radiometric Parameters

Flux = 72.824 lm Eff. : 47.76 lm/W  $F_e = 279.51$  mW

### Electrical parameters

V = 230.0 V I = 0.01411 A P = 1.525 W PF = 0.4699

**Schiefer Professional Lighting**

[www.professional-lighting.eu](http://www.professional-lighting.eu)