

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L145132027

Type of light source:

| | | | |
|---|-----|---------------------------------|------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E14 | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | No |

Product parameters

| Parameter | Value | Parameter | Value |
|--|----------------------|--|---|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 3 | Energy efficiency class | F |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 320 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 |
| On-mode power (P_{on}), expressed in W | 3,3 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 80 |
| Outer dimensions without separate control gear, lighting control | Height | 51 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 16 | |
| | Depth | 16 | |
| | | | See image in last page |

| | | | |
|---|------|---------------------------------------|----------------|
| parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,463 0,415 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | -4 | Survival factor | 0,90 |
| the lumen maintenance factor | 0,90 | | |
| Parameters for LED and OLED mains light sources: | | | |
| displacement factor (cos ϕ_1) | 0,50 | Colour consistency in McAdam ellipses | 5 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | 0,3 | Stroboscopic effect metric (SVM) | 0,3 |

(a)-: not applicable;

(b)-: not applicable;


SPL Spectrum Test Report

| | | | |
|---------------|-------------|-------------|-----------------------|
| Sample | : | Date | : 2021-05-27 13:04:08 |
| Specification | : E14 4W | Sam. Status | : |
| Sample No. | : E14 4W 01 | Instrument | : HaasSuite(EVERFINE) |
| Manufacturer | : | Test by | : Schiefer |
| | | Assessor | : damin |

Test Condition

| | | | |
|-------------|---------------|-------------|---------------|
| Temperature | : 25.3Deg | RH | : 65.0% |
| WL Range | : 380nm-780nm | IP | : 52397 (80%) |
| Test Mode | : Fast Test | T | : 67 ms |
| | | Sensitivity | : High |

Spectrum

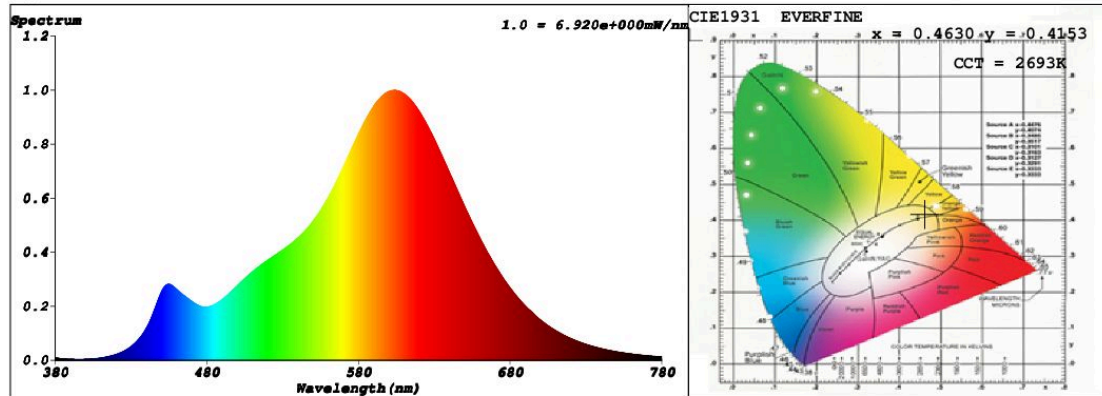

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4630$ $y = 0.4153$ / $u' = 0.2624$ $v' = 0.5296$ ($duv=1.46e-03$)

CCT= 2693K Prcp WL: $L_d=583.8nm$ Purity=63.6%

Peak WL: $L_p=604nm$ FWHM: $=108.1nm$ Ratio:R=24.8% G=72.8% B=2.4%

Render Index: $R_a = 80.0$

R1 =78 R2 =92 R3 =92 R4 =76 R5 =79 R6 =92 R7 =79

R8 =52 R9 =-4 R10=82 R11=76 R12=77 R13=81 R14=96 R15=69

LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 311.29 lm Eff. : 92.72 lm/W $F_e = 943.42$ mW

Electrical parameters

V = 230.0 V I = 0.03120 A P = 3.357 W PF = 0.4680

Schiefer Professional Lighting

www.spl-lighting.com