

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SPL

**Supplier's address:** Sales, Potterbakkerstraat 35, 4871EP Etten-Leur Noord Brabant, NL

**Model identifier:** L641800930

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	R7s		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	9	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	830 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	9,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,440
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	3	Survival factor	0,90
the lumen maintenance factor	0,93		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a): not applicable;

(b): not applicable;

## SPL Spectrum Test Report

Sample :  
 Specification : L641800930  
 Sample No. : 2  
 Manufacturer :


Date : 2021-08-11 15:47:49  
 Sam. Status :  
 Instrument : HaasSuite(EVERFINE)  
 Test by : Renee  
 Assessor : damin

### Test Condition

Temperature : 25.3Deg  
 WL Range : 380nm-780nm  
 Test Mode : Fast Test

RH : 65.0%  
 IP : 51281 (78%)  
 T : 25 ms  
 Sensitivity : High

### Spectrum

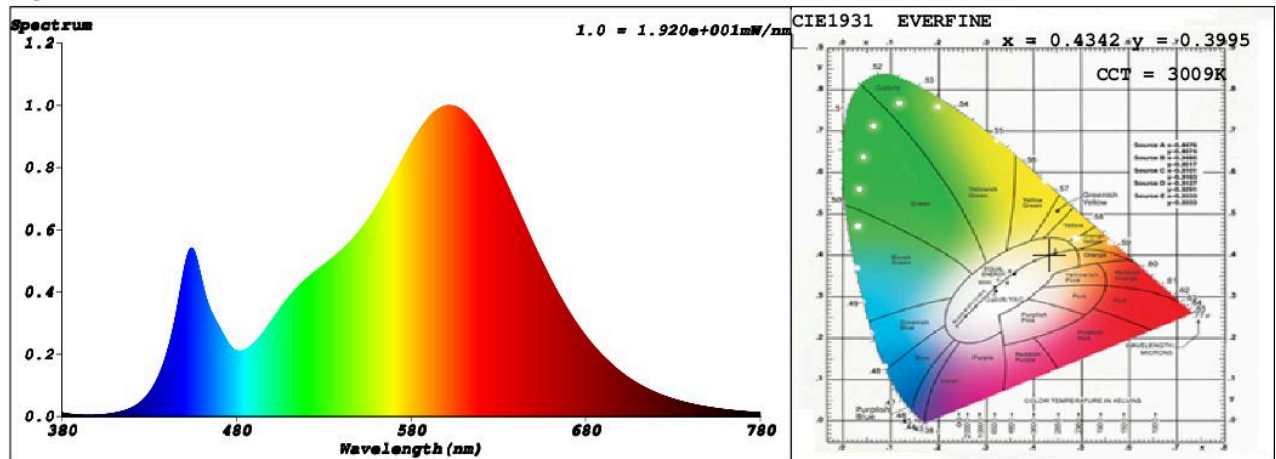

Spectral Distribution

CIE1931 Chromaticity Diagram

### Colorimetric Parameters

Chromaticity Coordinate:  $x = 0.4342$   $y = 0.3995$  /  $u' = 0.2508$   $v' = 0.5192$  ( $duv = -1.45e-03$ )  
 CCT= 3009K Prcp WL:  $L_d = 583.3nm$  Purity=50.2%  
 Peak WL:  $L_p = 602nm$  FWHM: =122.0nm Ratio:R=22.8% G=74.5% B=2.7%

Render Index:  $R_a = 81.6$

R1 =80 R2 =92 R3 =95 R4 =78 R5 =81 R6 =90 R7 =81  
 R8 =56 R9 =3 R10=81 R11=77 R12=72 R13=83 R14=98 R15=73  
 LEVEL:OUT WHITE:ANSI\_3000K

### Photometric & Radiometric Parameters

Flux = 929.67 lm Eff. : 161.55 lm/W Fe = 2.8254 W

### Electrical parameters

V = 229.8 V I = 0.03460 A P = 5.755 W PF = 0.7239

**Schiefer Professional Lighting**

www.spl-lighting.com