

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Deko-Light

Supplier's address: Product Management, Deko-Light Elektronik Vertriebs GmbH, Auf der Hub 2, D-76307 Karlsbad, DE

Model identifier: 348099

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	other electrical		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	72	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	6 997 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700 or 3 500 or 4 000
On-mode power (P_{on}), expressed in W	72,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	71	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	189	
	Depth	578	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,382 0,380
Parameters for directional light sources:			
Peak luminous intensity (cd)	5 220	Beam angle in degrees, or the range of beam angles that can be set	71
Parameters for LED and OLED light sources:			
R9 colour rendering index value	8	Survival factor	0,90
the lumen maintenance factor	0,70		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. ^(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a)'.-' : not applicable;

(b)'.-' : not applicable;

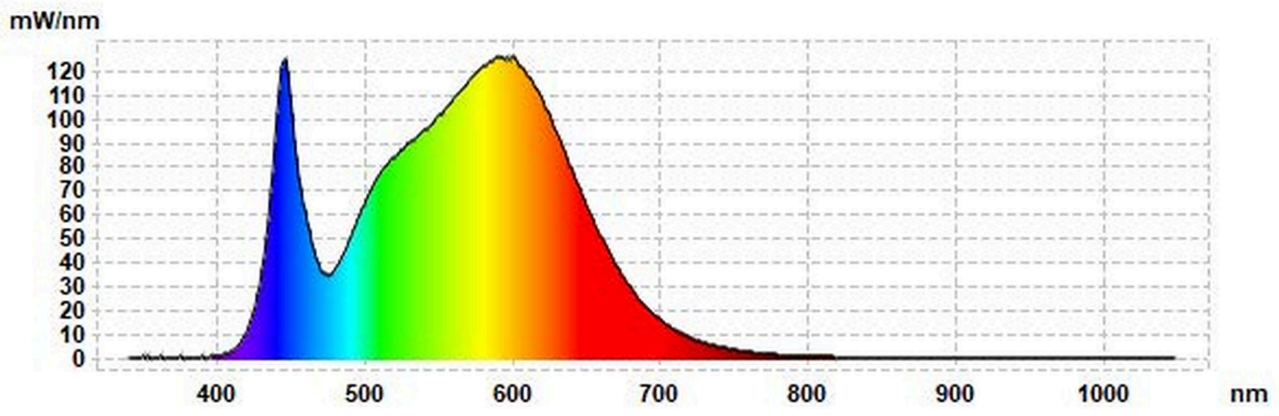

Model placed on the Union market from 23/03/2021



EPREL registration number: 862883

<https://eprel.ec.europa.eu/qr/862883>

Supplier: Deko-Light Elektronik-Vertriebs GmbH (Manufacturer)

Website: <https://deko-light.com/>

Customer care service:

Name: Product Management, Deko-Light Elektronik Vertriebs GmbH

Website: <https://deko-light.com/>

Email: pm@deko-light.com

Phone: +4972489271724

Address:

Auf der Hub 2
D-76307 Karlsbad
Germany