

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** SG

**Supplier's address:** Peter Sjøe Mikkelsen - R&D, Skytterheia 25, 4790 Lillesand, NO

**Model identifier:** 830916 - S1BEIEC00NWK201

## Type of light source:

|                                                     |     |                                 |      |
|-----------------------------------------------------|-----|---------------------------------|------|
| Lighting technology used:                           | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | G95 |                                 |      |
| Mains or non-mains:                                 | MLS | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No  | Envelope:                       | -    |
| High luminance light source:                        | No  |                                 |      |
| Anti-glare shield:                                  | Yes | Dimmable:                       | Yes  |


## Product parameters

| Parameter                                                                                                                                      | Value                     | Parameter                                                                                                                                                  | Value                  |
|------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| <b>General product parameters:</b>                                                                                                             |                           |                                                                                                                                                            |                        |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                  | 15                        | Energy efficiency class                                                                                                                                    | G                      |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 1 200 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700                  |
| On-mode power ( $P_{on}$ ), expressed in W                                                                                                     | 15,0                      | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal                                                                               | 0,00                   |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                         | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 90                     |
| Outer dimensions without separate control gear, lighting control                                                                               | Height                    | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                | Width                     |                                                                                                                                                            |                        |
|                                                                                                                                                | Depth                     |                                                                                                                                                            |                        |


|                                                                                                                         |      |                                       |                |  |
|-------------------------------------------------------------------------------------------------------------------------|------|---------------------------------------|----------------|--|
| parts and non-lighting control parts, if any (millimetre)                                                               |      |                                       |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -    | If yes, equivalent power (W)          | -              |  |
|                                                                                                                         |      | Chromaticity coordinates (x and y)    | 0,466<br>0,420 |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |      |                                       |                |  |
| R9 colour rendering index value                                                                                         | 59   | Survival factor                       | 0,90           |  |
| the lumen maintenance factor                                                                                            | 0,96 |                                       |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |      |                                       |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,90 | Colour consistency in McAdam ellipses | 3              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)     | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 0,2  | Stroboscopic effect metric (SVM)      | 0,0            |  |

(a) '-': not applicable;

(b) '-': not applicable;

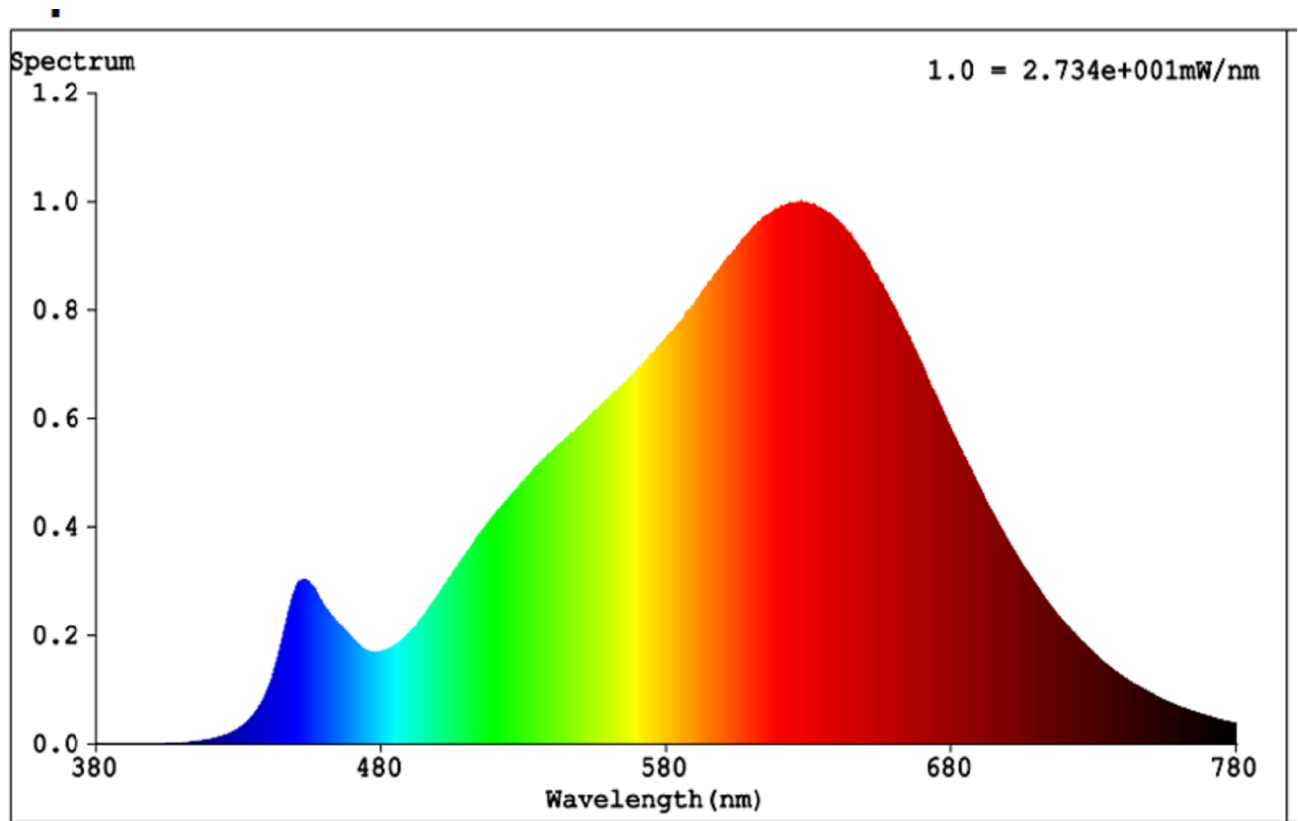

Model placed on the Union market from 01/10/2021



**EPREL registration number:** 874580

<https://eprel.ec.europa.eu/qr/874580>

**Supplier:** SG Armaturen AS (Importer)

**Website:** [www.sg-as.com](http://www.sg-as.com)

**Customer care service:**

**Name:** Peter Søre Mikkelsen - R&D

**Website:**

**Email:** [peter.soe.mikkelsen@sg-as.dk](mailto:peter.soe.mikkelsen@sg-as.dk)

**Phone:** +4563181560

**Address:**

Skytterheia 25  
4790 Lillesand  
Norway