

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Deko-Light

**Supplier's address:** Product Management, Deko-Light Elektronik Vertriebs GmbH, Auf der Hub 2, D-76307 Karlsbad, DE

**Model identifier:** 730209

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	other electrical		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------


### General product parameters:

Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	E
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	685 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power ( $P_{on}$ ), expressed in W	7,7	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, light-	Height	75	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	125	
	Depth	125	
			See image in last page


ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,434 0,403
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	1 514	Beam angle in degrees, or the range of beam angles that can be set	28
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	-1	Survival factor	0,90
the lumen maintenance factor	0,70		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,50	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	.. <sup>(b)</sup>	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,4	Stroboscopic effect metric (SVM)	2,2

<sup>(a)</sup>.. : not applicable;

<sup>(b)</sup>.. : not applicable;

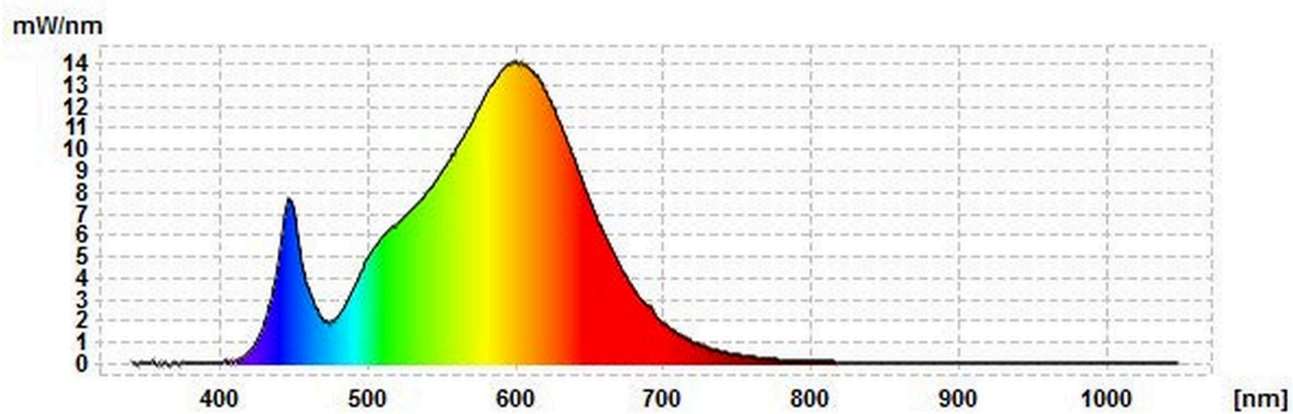

Model placed on the Union market from 07/05/2013



**EPREL registration number:** 878532

<https://eprel.ec.europa.eu/qr/878532>

**Supplier:** Deko-Light Elektronik-Vertriebs GmbH (Manufacturer)

**Website:** <https://deko-light.com/>

**Customer care service:**

**Name:** Product Management, Deko-Light Elektronik Vertriebs GmbH

**Website:** <https://deko-light.com/>

**Email:** [pm@deko-light.com](mailto:pm@deko-light.com)

**Phone:** +4972489271724

**Address:**

Auf der Hub 2  
D-76307 Karlsbad  
Germany