
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

sources		, , ,	2015 with regard to energ	c. c
Supplier's name	e or trade mark:	SG		
Supplier's addr	ess: Peter Søe M	ikkelsen - R&D, Sky	tterheia 25, 4790 Lillesai	nd, NO
Model identifie	r: 907005 - S04U	DA065CWCB200		
Type of light so	urce:			
Lighting technology used:		LED	Non-directional or directional:	DLS
Light source cap-type		N/A		
(or other electric interface)				
Mains or non-mains:		NMLS	Connected light source (CLS):	No
Colour-tuneable light source:		No	Envelope:	-
High luminance light source:		No		
Anti-glare shield:		Yes	Dimmable:	Yes
		Product para		1
Parameter		Value	Parameter	Value
		General product		I
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		1	Energy efficiency class	G
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		70 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power (P <sub>on</sub> ), expressed in W		1,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90
Outer dimen-	Height	28	Spectral power dis-	See image
sions without	Width	33	tribution in the	in last page
separate con- trol gear, light- ing control		33	range 250 nm to 800 nm, at full-load	

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,389			
		nates (x and y)	0,385			
Parameters for directional light sources:						
Peak luminous intensity (cd)	173	Beam angle in degrees, or the range of beam angles that can be set	31			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	60	Survival factor	0,90			
the lumen maintenance factor	0,96					

(a)'-': not applicable; (b)'-': not applicable;

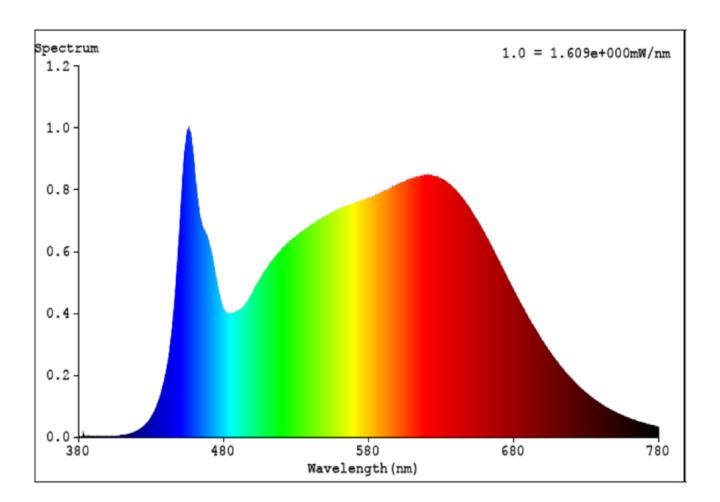

Model placed on the Union market from 09/08/2019



**EPREL registration number:** 910431 https://eprel.ec.europa.eu/qr/910431

Supplier: SG Armaturen AS (Importer) Website: www.sg-as.com

**Customer care service:** 

Name: Peter Søe Mikkelsen - R&D Website:

Email: peter.soe.mikkelsen@sg-as.dk Phone: +4563181560

**Address:** Skytterheia 25 4790 Lillesand

Norway