

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Dansani

**Supplier's address:** Dansani, Finlandsvej 8, 6100 Haderslev, DK

**Model identifier:** 190303880-87 Jupiter

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	No cap-type		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	E
Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	678 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2100...6500
On-mode power ( $P_{\text{on}}$ ), expressed in W	5,1	Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	93
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,295 0,285	
<b>Parameters for LED and OLED light sources:</b>				
R9 colour rendering index value	78	Survival factor	0,90	
the lumen maintenance factor	0,96			

(a) '-': not applicable;

(b) '-': not applicable;

## Spectrum Test Report

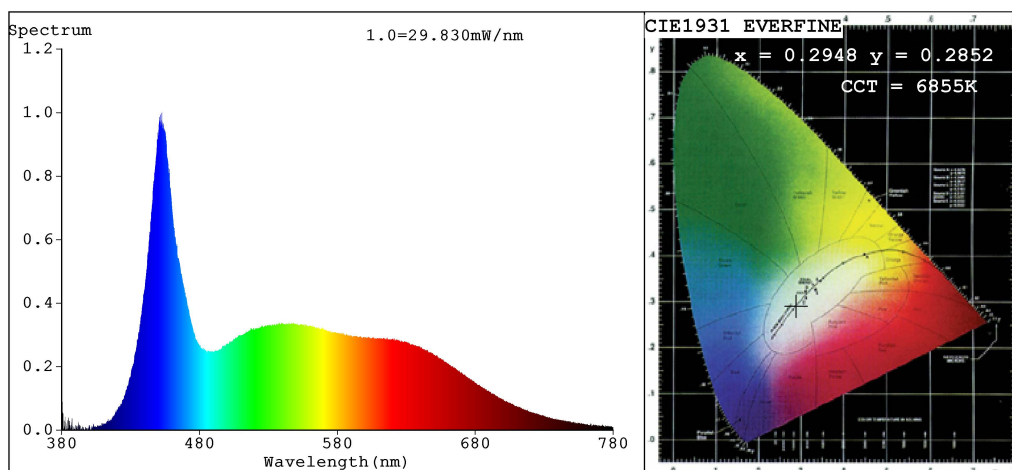

### Color Parameters:

Chromaticity Coordinate:  $x=0.2948$   $y=0.2852$   $u'=0.2021$   $v'=0.4401$   
CCT=6855K(Duv=-0.0105) Dominant WL:Ld =471.7nm Purity=18.0%  
Ratio:R=15.5% G=76.9% B=7.5% Peak WL:Lp=452.7nm FWHM=25.4nm  
Render Index:Ra=93.0  
R1 =91 R2 =95 R3 =89 R4 =96 R5 =92 R6 =88 R7 =99  
R8 =94 R9 =78 R10=91 R11=94 R12=68 R13=92 R14=93 R15=89

### Photo Parameters:

Flux = 678.5 lm Eff. : 133.92 lm/W Fe = 2.700 W

### Electrical parameters:

V = 12.000 V I = 0.4222 A P = 5.066 W PF = 1.000


LEVEL:OUT WHITE:OUT

Status: Integral T = 651 ms Ip = 33289 (51%)

Model:TPR-08VCH-6500K-LED  
Tester:ZW  
Temperature:25.3Deg  
Manufacturer:

Number:2  
Date:2021-08-27  
Humidity:65.0%  
Remarks:

Model placed on the Union market from 15/12/2017



**EPREL registration number:** 916144

<https://eprel.ec.europa.eu/qr/916144>

**Supplier:** Dansani A/S (Manufacturer)

**Website:**

**Customer care service:**

**Name:** Dansani

**Website:** [www.dansani.dk](http://www.dansani.dk)

**Email:** [sba@dansani.dk](mailto:sba@dansani.dk)

**Phone:** +4523829794

**Address:**

Finlandsvej 8  
6100 Haderslev  
Denmark