

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ANTIDARK

Supplier's address: Antidark Aps, damgårdvej 2, 5500 Middelfart , DK

Model identifier: 2-450-01-2

Type of light source:

| | | | |
|---|------------|---------------------------------|-----|
| Lighting technology used: | LED | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | Integrated | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | Yes | Dimmable: | Yes |


Product parameters

| Parameter | Value | Parameter | Value |
|--|--------------------------|--|---|
| General product parameters: | | | |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 9 | Energy efficiency class | F |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 789 in Narrow cone (90°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 |
| On-mode power (P_{on}), expressed in W | 9,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 90 |
| Outer dimensions without separate control gear, lighting control | Height | 930 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 850 | |
| | Depth | 850 | |
| | | | See image in last page |

| | | | |
|---|-------|--|----------------|
| parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,454 0,407 |
| Parameters for directional light sources: | | | |
| Peak luminous intensity (cd) | 1 559 | Beam angle in degrees, or the range of beam angles that can be set | 113 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 72 | Survival factor | 1,00 |
| the lumen maintenance factor | 0,96 | | |
| Parameters for LED and OLED mains light sources: | | | |
| displacement factor (cos ϕ_1) | 1,00 | Colour consistency in McAdam ellipses | 3 |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - |
| Flicker metric (Pst LM) | 1,0 | Stroboscopic effect metric (SVM) | 0,4 |

(a) '-': not applicable;

(b) '-': not applicable;

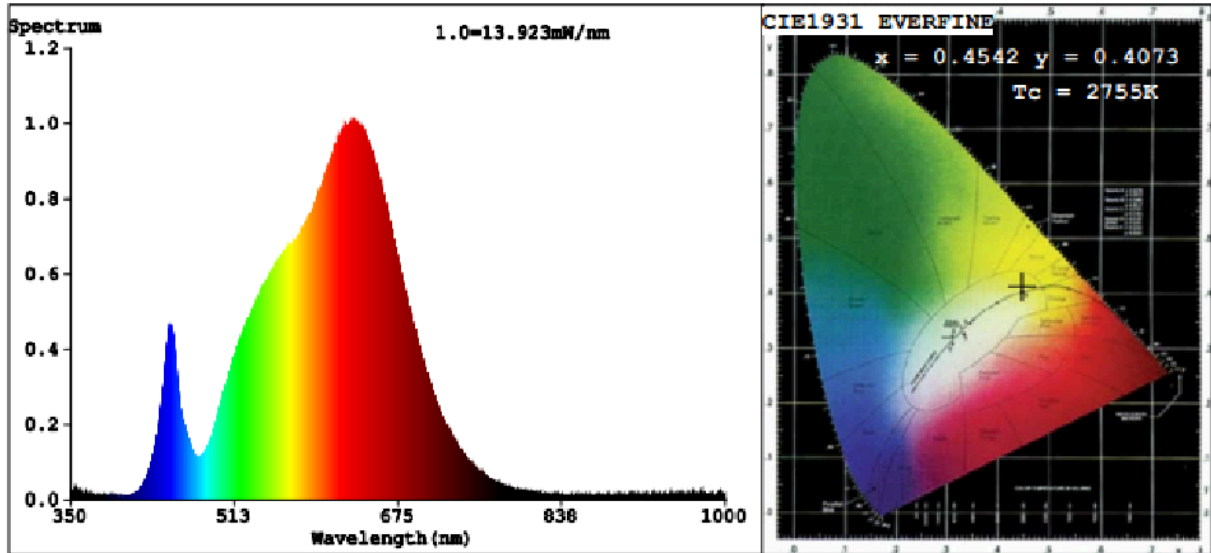

Color Parameters:

Chromaticity Coordinate: $x=0.4542$ $y=0.4073$ $u'=0.2603$ $v'=0.5252$

$T_c=2755K$ ($Duv=-0.0007$) Dominant WL: $L_d = 584.2nm$ Purity= 58.6%

Red Ratio: $R=27.6\%$ Peak WL: $L_p=630.9nm$ HWL: $L_{hd}=156.1nm$

Render Index: $R_a=91.7$

| | | | | | | | |
|--------|--------|--------|--------|--------|--------|--------|--------|
| R1 =93 | R2 =93 | R3 =91 | R4 =93 | R5 =92 | R6 =91 | R7 =94 | |
| R8 =88 | R9 =70 | R10=83 | R11=92 | R12=77 | R13=93 | R14=94 | R15=91 |

Photo Parameters:

Flux = 633.8 lm Eff. : 71.30 lm/W Fe = 2.317 W

Electrical parameters:

V = 17.77 V I = 0.5001 A P = 8.889 W PF = 1.000

LEVEL:OUT WHITE:ANSI_2700K

STATUS: INTEGRAL P = 633.8 lm Tc = 2755K (2700K)