

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Westal

**Supplier's address:** Produkt, Fabriksvägen 5, 564 35 Bankeryd, SE

**Model identifier:** 7451616

## Type of light source:

|   |      |                                 |     |
|---|------|---------------------------------|-----|
| Lighting technology used:                           | LED  | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | n/a  |                                 |     |
| Mains or non-mains:                                 | NMLS | Connected light source (CLS):   | No  |
| Colour-tuneable light source:                       | No   | Envelope:                       | -   |
| High luminance light source:                        | No   |                                 |     |
| Anti-glare shield:                                  | No   | Dimmable:                       | Yes |



## Product parameters

| Parameter  | Value                   | Parameter  | Value   |
|--|-------------------------|--|---|
| <b>General product parameters:</b>   |                         |  |   |
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer  | 8                       | Energy efficiency class  | E   |
| Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 839 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 3 000   |
| On-mode power ( $P_{on}$ ), expressed in W   | 8,0                     | Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal   | 0,00  |
| Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal  | -                       | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set   | 90  |
| Outer dimensions without separate control gear, lighting control   | Height                  | 95   | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
|  | Width                   | 95   |   |
|  | Depth                   | 37   |   |
|  |                         |  | See image in last page  |


|   |      |  |                |
|---|------|--|----------------|
| parts and non-lighting control parts, if any (millimetre) |      |  |                |
| Claim of equivalent power <sup>(a)</sup>                  | -    | If yes, equivalent power (W)                                       | -              |
|   |      | Chromaticity coordinates (x and y)                                 | 0,440<br>0,403 |
| <b>Parameters for directional light sources:</b>          |      |  |                |
| Peak luminous intensity (cd)                              | 373  | Beam angle in degrees, or the range of beam angles that can be set | 110            |
| <b>Parameters for LED and OLED light sources:</b>         |      |  |                |
| R9 colour rendering index value                           | 58   | Survival factor  | 1,00           |
| the lumen maintenance factor                              | 0,96 |  |                |

(a) : not applicable;

(b) : not applicable;

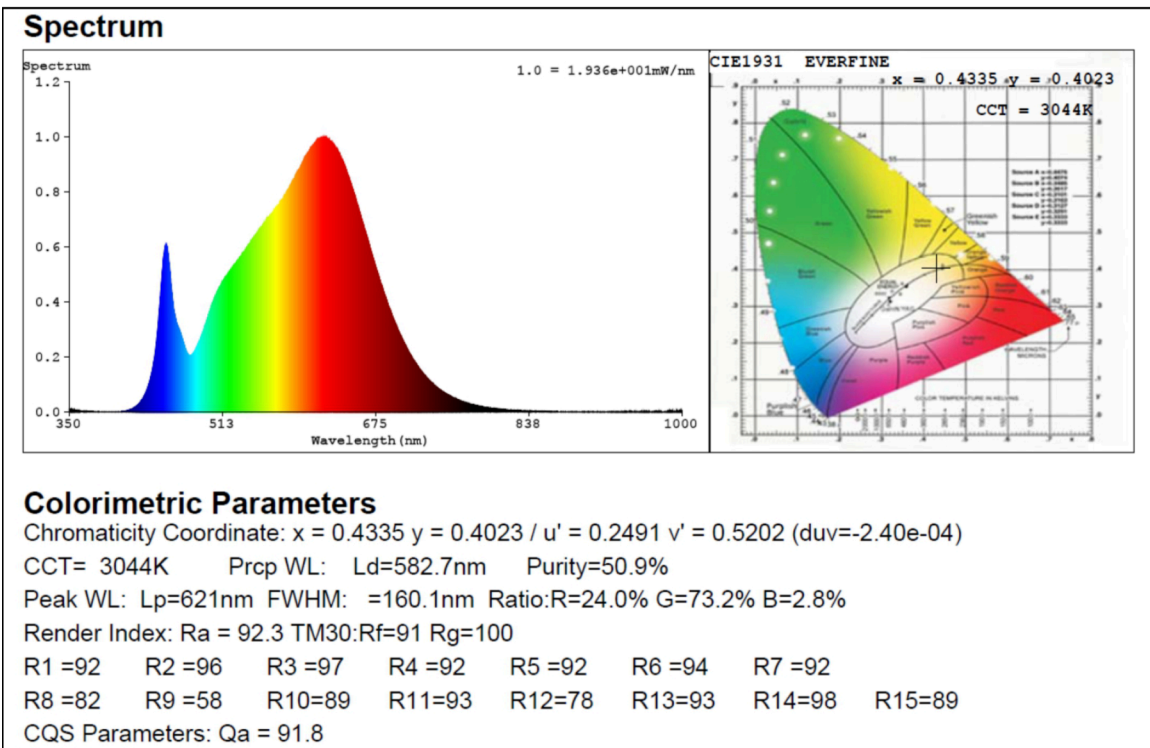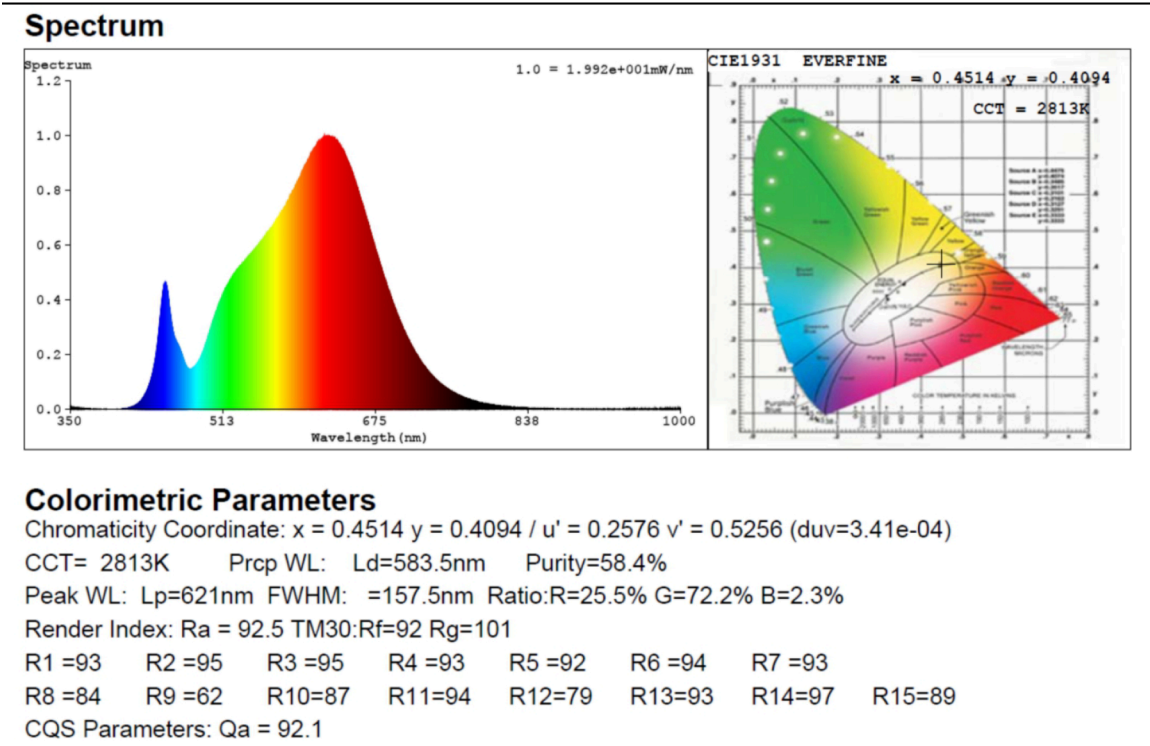

Model placed on the Union market from 30/08/2021



**EPREL registration number:** 917818

<https://eprel.ec.europa.eu/qr/917818>

**Supplier:** Westal AB (Importer)

**Website:**

**Customer care service:**

**Name:** Produkt

**Website:** <https://www.westal.se/>

**Email:** [timmy.kantola@westal.se](mailto:timmy.kantola@westal.se)

**Phone:** 0738-26 40 03

**Address:**

Fabriksvägen 5  
564 35 Bankeryd  
Sweden