

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ANTIDARK

Supplier's address: Antidark Aps, damgårdvej 2, 5500 Middelfart , DK

Model identifier: 2-237-35

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	integrated		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	Yes


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	10	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	382 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	9,4	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	230	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	44	
	Depth	90	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,427 0,399
Parameters for directional light sources:			
Peak luminous intensity (cd)	243	Beam angle in degrees, or the range of beam angles that can be set	113
Parameters for LED and OLED light sources:			
R9 colour rendering index value	53	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	1,00	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a) '-': not applicable;

(b) '-': not applicable;

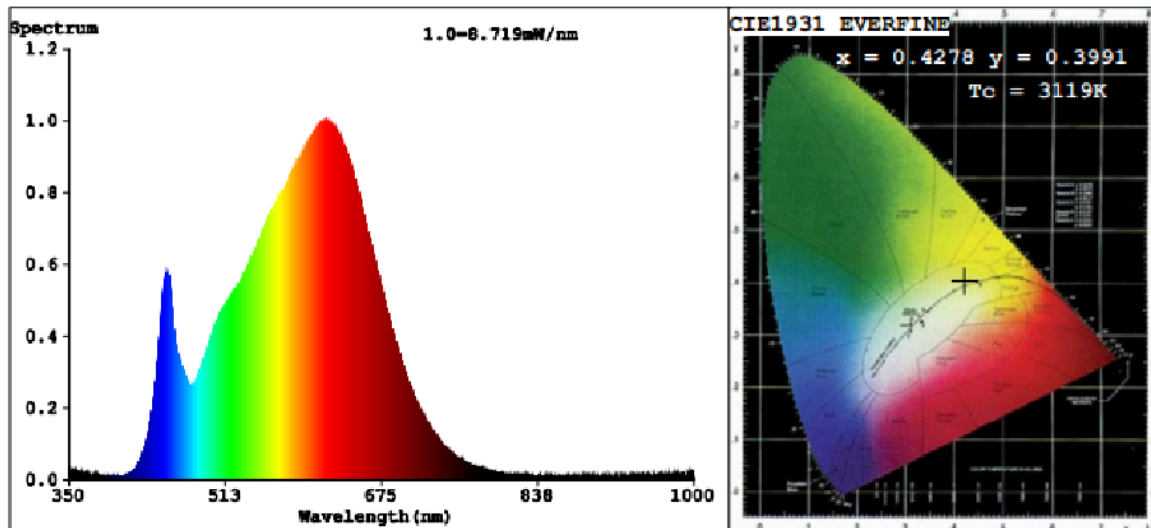

Color Parameters:

Chromaticity Coordinate: $x=0.4278$ $y=0.3991$ $u'=0.2468$ $v'=0.5180$
 $T_c=3119K$ (Duv=-0.0007) Dominant WL:Ld =582.6nm Purity=48.2%
 Red Ratio:R=24.8% Peak WL:Lp=612.5nm HWL:Lhd=162.7nm
 Render Index:Ra=91.1
 R1 =91 R2 =95 R3 =98 R4 =90 R5 =90 R6 =94 R7 =91
 R8 =79 R9 =53 R10=88 R11=90 R12=81 R13=92 R14=99 R15=87

Photo Parameters:

Flux = 450.2 lm Eff. : 49.10 lm/W Fe = 1.544 W

Electrical parameters:

V = 18.34 V I = 0.5000 A P = 9.169 W PF = 1.000

LEVEL:OUT WHITE:ANSI_3000K

Status: Integral T = 95 ms Ip = 51644 (79%)