

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Buster+Punch

**Supplier's address:** Buster and Punch Ltd, St. Peters Street 29, PE9 2PF Stamford, UK

**Model identifier:** BB-TD-E27-ND-SM-B

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters


Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	75 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 600
On-mode power ( $P_{on}$ ), expressed in W	2,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	170	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	65	
	Depth	65	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,420
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	10	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,40	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;

### Light Source Test Report

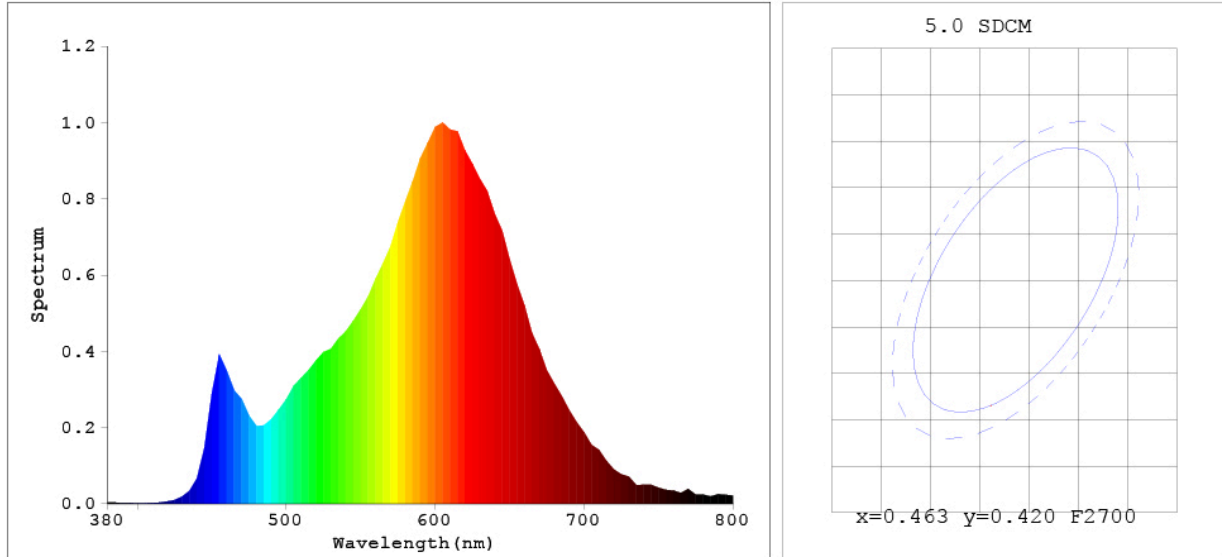

#### Color Parameters:

Chromaticity Coordinate:  $x=0.4608$   $y=0.4092$  /  $u'=0.2638$   $v'=0.5269$   
Tc=2675K Dominant WL:Ld=584.5nm Purity=61.1% Centroid WL:598.0nm  
Ratio:R=27.6% G=70.1% B=2.3% Peak WL:Lp=605.0nm HWL:113.1nm  
Render Index:Ra=83.5  
R1 =83 R2 =95 R3 =92 R4 =80 R5 =84 R6 =95 R7 =80  
R8 =58 R9 =13 R10=89 R11=81 R12=78 R13=87 R14=96 R15=75

#### Photo Parameters:

Flux: 72.66 lm Fe: 0.34408 WEfficacy:33.21 lm/W  
LEVEL: WHITE:ANSI\_2700K

#### Electrical Parameters:

Luminaire: U=221.2V I=0.01932A P=2.186W PF=0.5121

#### Instrument Status:


Scan Range:380.0nm-800.0nm Interval:5.0nm[0] Ip=8298 (G=6,D=85)  
REF=4602 (R=4) %=-0.067% PMT: 32.4 centigrade [56.8]

---

Product Type:BB-TD-E27-ND-SM-B  
Number:11  
Temperature:25.3 deg  
Test Operator:01  
Software:V2.00.100

Manufacturer:  
Test Department:TTC  
Humidity:65.0%  
Test Date:2021-08-18 10:45:27  
Instrument:PMS-80\_V1 (SN:1010017)

Model placed on the Union market from 30/10/2015



**EPREL registration number:** 920320

<https://eprel.ec.europa.eu/qr/920320>

**Supplier:** Ning Pan (Manufacturer)

**Website:** <https://www.busterandpunch.com/>

**Customer care service:**

**Name:** Buster and Punch Ltd

**Website:**

**Email:** [info@busterandpunch.com](mailto:info@busterandpunch.com)

**Phone:** +442074070888

**Address:**

St. Peters Street 29  
PE9 2PF Stamford  
United Kingdom