

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Buster+Punch

**Supplier's address:** Buster and Punch Ltd, St. Peters Street 29, PE9 2PF Stamford, UK

**Model identifier:** BU-TD-E27-LED-F-CR-A

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	3	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	380 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	3,5	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	145	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	70	
	Depth	70	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,420
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	10	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,90	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;

# Report of Spectroradiometric & Electric Analysis for Light Source

Model No.:

Sample SN:

Manufacturer:

Tested By: Lucky

Description:

Test Report No.:

Date: 09-04-2021

Reviewed By: Ian Luo

## Test Condition



Temperature: °C

RH: %

Spectrum Range: 380-800 nm

Scan Step: 5 nm

## Spectroradiometric Parameters

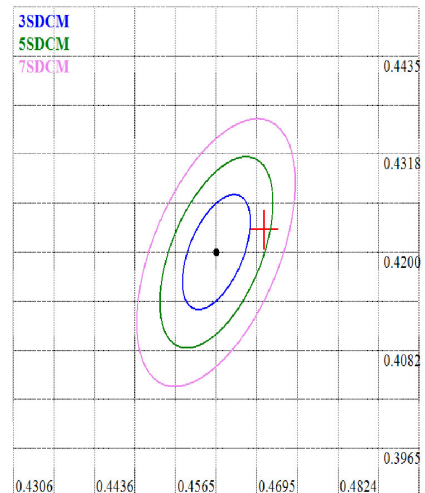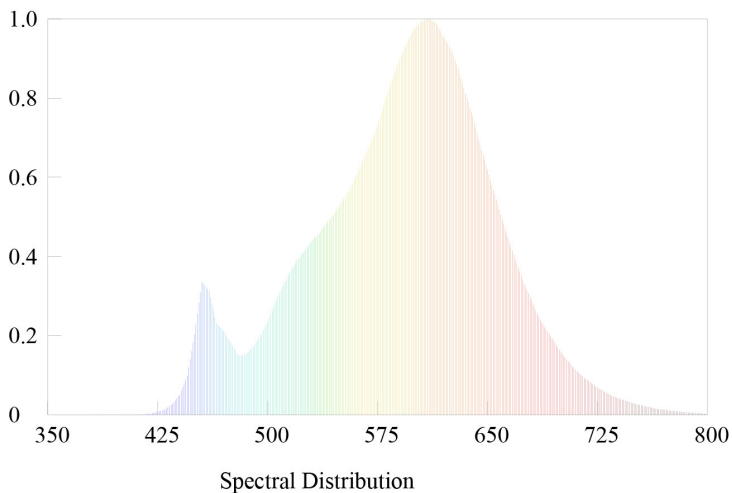

Nominal CCT:IEC\_F2700  
x0=0.4630 y0=0.4200

Chromaticity Coordinates:  $x=0.4706$   $y=0.4227$   $u'=0.264$   $v'=0.5335$

Correlated Color Temperature: 2647 K

Dominant Wavelength: 582.0 nm(E)

Colour Fidelity Index:  $R_f=82$

Gamut Index:  $R_g=91$

Luminous Flux: 529.27 lm

Purity: 0.6838

Chromaticity Difference:  $+0.00353$ Duv

Peak Wavelength: 610.0 nm

Color Ratio:  $K_r=48.2\%$   $K_g=45.7\%$   $K_b=6.2\%$

Color Tolerance(SDCM): 4.4

Bandwidth: 111.7nm

Radiant Flux: 1.785 W

Photosynthetically Active Radiation(PAR): 1.73W

Photosynthetic Photon Flux(PPF):8.56 $\mu$ mol/s

Rendering Index:  $R_a=82.9$

R1=81 R2=91 R3=97 R4=80 R5=81 R6=91 R7=83 R8=58

R9=9 R10=80 R11=80 R12=69 R13=85 R14=99 R15=73 Re=77

## Electric Parameters

Voltage: 230.14 V

Current: 0.0178 A


Power Factor: 0.9170

Power: 3.75 W

Luminous Efficacy: 141.1 lm/W

SENSING Instruments Co.,Ltd

Model placed on the Union market from 09/05/2017



**EPREL registration number:** 920411

<https://eprel.ec.europa.eu/qr/920411>

**Supplier:** Ning Pan (Manufacturer)

**Website:** <https://www.busterandpunch.com/>

**Customer care service:**

**Name:** Buster and Punch Ltd

**Website:**

**Email:** [info@busterandpunch.com](mailto:info@busterandpunch.com)

**Phone:** +442074070888

**Address:**

St. Peters Street 29

PE9 2PF Stamford

United Kingdom