

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ANTIDARK

Supplier's address: Antidark Aps, damgårdvej 2, 5500 Middelfart , DK

Model identifier: 2-350-03-2

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	integrated		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	Yes	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	310 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	4,8	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, lighting control	Height	450	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	190	
	Depth	350	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,457 0,412
Parameters for directional light sources:			
Peak luminous intensity (cd)	718	Beam angle in degrees, or the range of beam angles that can be set	113
Parameters for LED and OLED light sources:			
R9 colour rendering index value	90	Survival factor	1,00
the lumen maintenance factor	1,00		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	1,00	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a) '-': not applicable;

(b) '-': not applicable;

Lightsource Test Report


Product Information

Product Spec: 2-350-03-2
Submitted Unit: 中山市轩明有限公司

Product Number: 1

CIE Colorimetric Parameters

Chromaticity coordinates: $x=0.4579$ $y=0.4124$ $u(u^*)=0.2604$ $v=0.3518$ $v'(v^*)=0.5277$
CCT: $Tc=2741K$ ($duv=0.00082$) Color Ratio: $R=0.262$ $G=0.714$ $B=0.024$
Peak Wavelength: 625.2nm Half Bandwidth: 151.0nm
Dominant Wavelength: 583.7nm Color Purity: 0.613
CRI: $Ra=93.8$ TM30: $Rf=93$, $Rg=100$
 $R1=94$ $R2=96$ $R3=97$ $R4=95$ $R5=94$ $R6=96$ $R7=93$ $R8=85$
 $R9=65$ $R10=90$ $R11=97$ $R12=87$ $R13=95$ $R14=97$ $R15=90$
Color Quality Scale: $Qa=92.0$, $Qf=94.0$, $Qp=94.2$, $Qg=96.2$
 $Q1=89$ $Q2=96$ $Q3=91$ $Q4=92$ $Q5=93$ $Q6=92$ $Q7=92$ $Q8=94$
 $Q9=97$ $Q10=94$ $Q11=94$ $Q12=94$ $Q13=94$ $Q14=88$ $Q15=88$

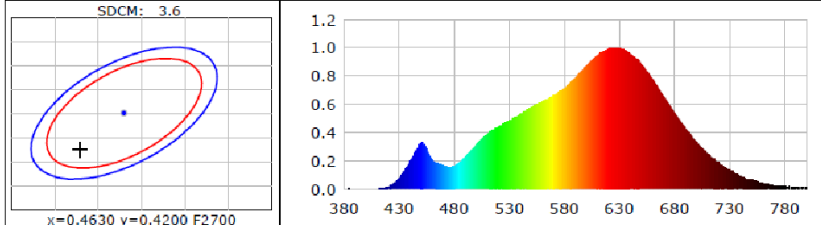

Photometric Parameters

Luminous Flux: 174.35 lm
EEI: 0.25

Efficiency: 33.92 lm/W Radiant Power: 0.616 W
Energy Efficiency Class: B (EU 874-2012)

Electric Parameters

Voltage: 230.90V
Power Factor: 0.4940


Current: 0.0450A Power: 5.14W
Frequency: 49.99Hz

Test Information

Scan Range: 380~800:1nm
Stabilization Time: 0 ms
Max of Signal: 43079 (2897)

Photometric Method: sphere-spectroradiometer
Photometric Condition: Sphere diameter: 1.00m, 4PI
CCD Integration Time: 1000.00 ms

Model placed on the Union market from 04/03/2021



EPREL registration number: 925810

<https://eprel.ec.europa.eu/qr/925810>

Supplier: Antidark Aps (Importer)

Website: www.antidark.dk

Customer care service:

Name: Antidark Aps

Website:

Email: tj@scanstudio.dk

Phone: +4540187474

Address:

damgårdvej 2
5500 Middelfart
Denmark