

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ECO LIGHT

Supplier's address: ECO LIGHT Sp. z o.o., 62-872 Borek k. Kalisza NIP 618 213 63 45, PL

Model identifier: EC79119

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E27		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	450 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P_{on}), expressed in W	5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	100	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	37	
	Depth	37	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,460 0,470
Parameters for LED and OLED light sources:			
R9 colour rendering index value	8	Survival factor	1,00
the lumen maintenance factor	0,96		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1

(a)-: not applicable;

(b)-: not applicable;

Light Source Test Report

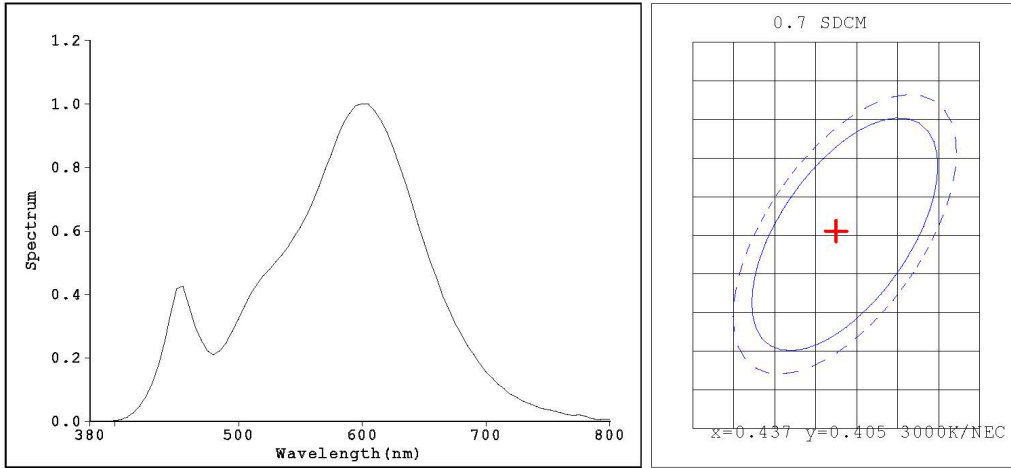

Color Parameters:

Chromaticity Coordinate: $x=0.4361$ $y=0.4053$
 Chromaticity Coordinate: $u'=0.4361$ $v'=0.4053$ ($duv=6.16e-04$)
 $Tc=3025K$ Dominant WL: $Ld=582.5nm$ Purity=52.5% Centroid WL: $588.0nm$
 Ratio: $R=24.2\%$ $G=73.4\%$ $B=2.4\%$ Peak WL: $Lp=600.0nm$ $HWL=125.7nm$
 Render Index: $Ra=81.3$
 R1 =79 R2 =90 R3 =96 R4 =79 R5 =80 R6 =88 R7 =82
 R8 =56 R9 =1 R10=78 R11=78 R12=72 R13=82 R14=98 R15=71

Photo Parameters:

Flux: 458.94 lm Efficacy: 90.88 lm/W

Electrical Parameters:

Luminaire: $U=230.4V$ $I=0.06511A$ $P=5.05W$ $PF=0.5670$


Instrument Status:

Scan Range: $380.0nm-800.0nm$ Interval: $5.0nm[0]$ $Ip=25570$ ($G=6, D=79$)
 REF=21252 ($R=4$) $\%=-1.869\%$ $PMT: 26.0$ centigrade [25.3]

Product Type: C5 3000K
 Number: 0000000220
 Temperature: 25.3 deg
 Test Operator: SD
 Software: V2.00.100

Manufacturer: EVERFINE
 Test Department: SDZM
 Humidity: 65.0%
 Test Date: 2021-08-02 14:39:55
 Instrument: PMS-50SSA_V1 (SN:11040019)

Model placed on the Union market from 01/09/2021



EPREL registration number: 977080

<https://eprel.ec.europa.eu/qr/977080>

Supplier: ECO LIGHT SPÓŁKA Z OGRANICZONĄ ODPOWIEDZIALNOŚCIĄ (Importer)

Website: www.ecolight.pl

Customer care service:

Name: ECO LIGHT Sp. z o.o.

Website:

Email: marcin.wos@ecolight.pl

Phone: 505991688

Address:

62-872 Borek k. Kalisza NIP 618 213 63 45
Poland