

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GUBI

Supplier's address: Héctor Mendoza, Orientkaj 18-20, 2150 Nordhavn, Denmark 18-20, 2150 Nordhavn Copenhagen, DK

Model identifier: 10083639/40-Unbound Table Lamp, H45

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Module		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
-----------	-------	-----------	-------

General product parameters:

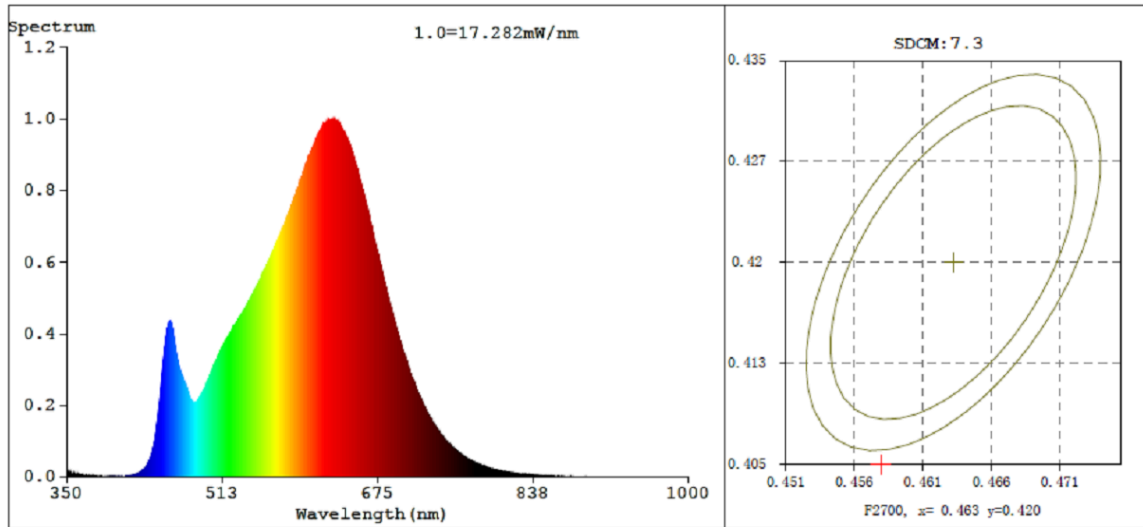
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	E
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	850 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	7,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	90
Outer dimensions without separate control gear, light-	Height	18	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	18	
	Depth	338	
			See image in last page

ing control parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,463 0,420
Parameters for directional light sources:			
Peak luminous intensity (cd)	9	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	0,90
the lumen maintenance factor	0,90		

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

**Color Parameters:**

Chromaticity Coordinate: $x=0.4577$ $y=0.4035$ / $u'=0.2643$ $v'=0.5243$

CCT=2674K (Duv=-0.0025) Dominant WL:Ld =585.2nm WL:Lc = --nm Purity=58.5%

Ratio:R=26.9% G=70.4% B=2.7% Peak WL:Lp=628.1nm FWHM=143.9nm

Render Index:Ra=93.4 AvgR=91.5