

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: GUBI

Supplier's address: Héctor Mendoza, Orientkaj 18-20, 2150 Nordhavn, Denmark 18-20, 2150 Nordhavn Copenhagen, DK

Model identifier: 10083626-27-Unbound Table Lamp, H120

Type of light source:

| | | | |
|---|--------|---------------------------------|-----|
| Lighting technology used: | LED | Non-directional or directional: | DLS |
| Light source cap-type (or other electric interface) | module | | |
| Mains or non-mains: | NMLS | Connected light source (CLS): | No |
| Colour-tuneable light source: | No | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | No |

Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|

General product parameters:

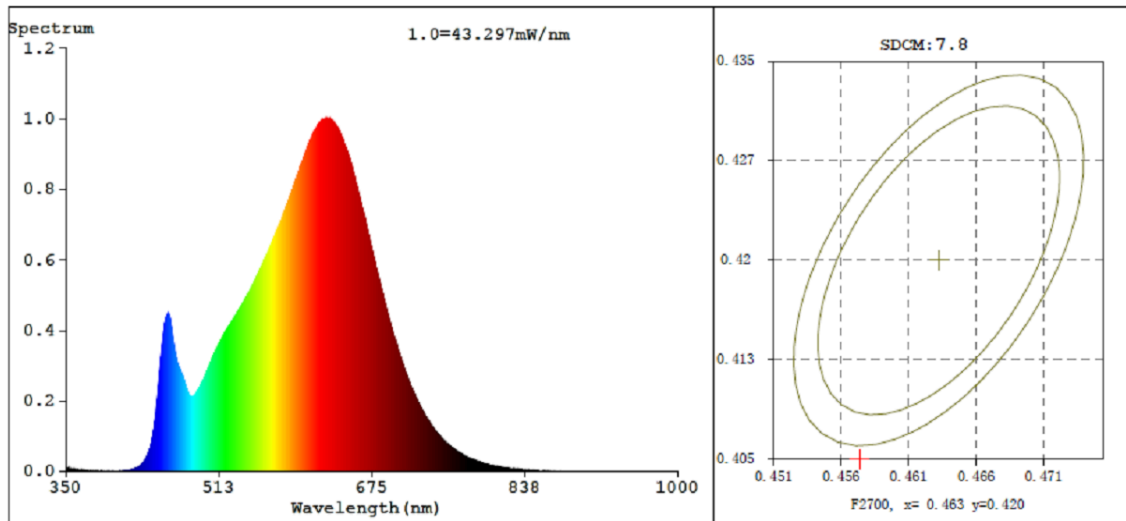
| | | | |
|--|---------------------------|--|---|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 18 | Energy efficiency class | E |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 2 150 in Wide cone (120°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 700 |
| On-mode power (P_{on}), expressed in W | 18,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,00 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | - | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 90 |
| Outer dimensions without separate control gear, light- | Height | 18 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 18 | |
| | Depth | 1 020 | |
| | | | See image in last page |

| | | | |
|---|------|--|----------------|
| ing control parts and non-lighting control parts, if any (millimetre) | | | |
| Claim of equivalent power ^(a) | - | If yes, equivalent power (W) | - |
| | | Chromaticity coordinates (x and y) | 0,463 0,420 |
| Parameters for directional light sources: | | | |
| Peak luminous intensity (cd) | 9 | Beam angle in degrees, or the range of beam angles that can be set | 120 |
| Parameters for LED and OLED light sources: | | | |
| R9 colour rendering index value | 1 | Survival factor | 0,90 |
| the lumen maintenance factor | 0,90 | | |

(a) : not applicable;

(b) : not applicable;

Spectrum Test Report

**Color Parameters:**

Chromaticity Coordinate: $x=0.4572$ $y=0.4024$ / $u'=0.2644$ $v'=0.5238$

CCT=2674K (Duv=-0.0028) Dominant WL:Ld =585.3nm WL:Lc = --nm Purity=58.0%

Ratio:R=26.9% G=70.3% B=2.8% Peak WL:Lp=625.9nm FWHM=143.7nm

Render Index:Ra=93.4 AvgR=91.7