

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: LOOM Design

Supplier's address: Main Office, Lilleringvej 30, 8462 Aarhus Harlev, DK

Model identifier: 832-001

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	CLS		
Mains or non-mains:	NMLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Only with specific dimmers

Product parameters


Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	7	Energy efficiency class	G
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	360 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	6,8	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,00	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	94
Outer dimensions without separate control gear, light-	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,458 0,407	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	63	Survival factor	0,94	
the lumen maintenance factor	0,94			

(a) '-': not applicable;

(b) '-': not applicable;

Spectrum Test Report

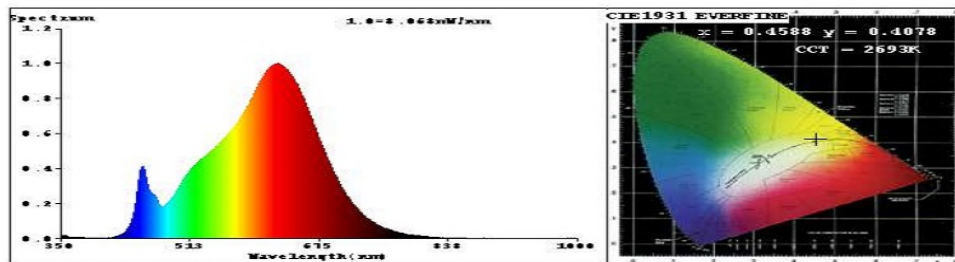

Color Parameters:

Chromaticity Coordinate: $x=0.4588$ $y=0.4078$ $u'=0.2631$ $v'=0.5261$
CCT=2693K (Duv=-0.0010) Dominant WL: $L_d=584.6\text{nm}$ WL: $L_c=--\text{nm}$ Purity=60.1%
Ratio: R=26.8% C=70.7% B=2.5% Peak WL: $L_p=623.8\text{nm}$ FWHM=141.9nm
Render Index: Ra=94.0 AvgR=91.8 TM30: Rf=92 Rg=100

R1=95 R2=98 R3=99 R4=95 R5=95 R6=97 R7=91
R8=82 R9=63 R10=95 R11=96 R12=85 R13=96 R14=99 R15=90

Photo Parameters:

Flux = 361.2 lm Eff. : 52.90 lm/W Fe = 1.294 W

Electrical parameters:


V = 219.43 V I = 0.03308 A P = 6.828 W PF = 0.9407
LEVEL: OUT WHITE: ANSI_2700K
Status: Integral T = 580 ms Ip = 48880 (75%)

GBT5702

Model: 曲奇壁灯A
Tester:
Temperature: 25.3Deg
Manufacturer:

Number: 7W-2700K
Date: 2023-09-15 14:25:21
Humidity: 65.0%
Remarks:

Model placed on the Union market from 01/01/2024



EPREL registration number: 1774683

<https://eprel.ec.europa.eu/qr/1774683>

Supplier: Lampefeber A/S (Importer)

Website: www.lampefeber.com

Customer care service:

Name: Main Office

Website: www.loom-design.com

Email: mail@lampefeber.com

Phone: +4586361722

Address:

Lilleringvej 30
8462 Harlev
Denmark