
## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

sources	PELEGATED REGUL	-AHON (EU) 2019/2	2015 with regard to energ	gy labelling of light
Supplier's name	e or trade mark:	LEDVANCE		
Supplier's addre	ess: LEDVANCE G	imbH, Parkring 33,	Garching, Germany	
Model identifie	er: AC33388			
Type of light so	urce:			
Lighting technology used:		LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)		Constant cur- rent: 300 mA		
Mains or non-mains:		NMLS	Connected light source (CLS):	No
Colour-tuneable light source:		No	Envelope:	-
High luminance light source:		No		
Anti-glare shield:		No	Dimmable:	No
		Product para		T -
Parameter		Value	Parameter	Value
		General product p	<u></u>	I
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		12	Energy efficiency class	E
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		1 450 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500
On-mode power (P <sub>on</sub> ), expressed in W		12,6	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height Width Depth	160 160 52	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,312			
		nates (x and y)	0,328			
Parameters for directional light sources:						
Peak luminous intensity (cd)	750	Beam angle in degrees, or the range of beam angles that can be set	100			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	0	Survival factor	0,90			
the lumen maintenance factor	0,96					

(a)'-': not applicable; (b)'-': not applicable;

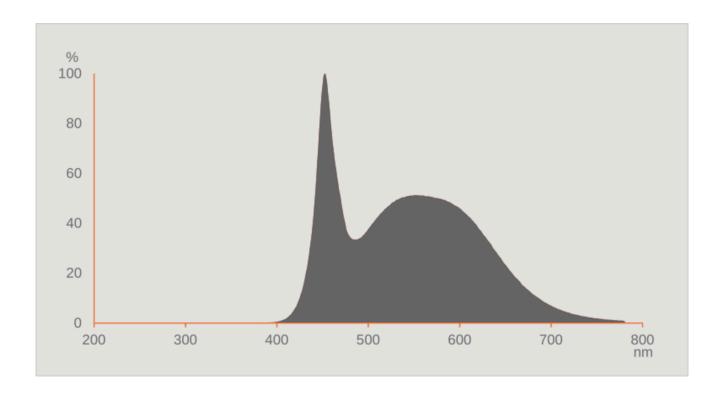

Model placed on the Union market from 09/09/2021



**EPREL registration number:** 617480 https://eprel.ec.europa.eu/qr/617480

Supplier: LEDVANCE GmbH (Manufacturer) Website: http://www.ledvance.com/

**Customer care service:** 

Name: LEDVANCE GmbH Website:

Email: contact@ledvance.com Phone: +49 89-780673-100

Address:

Parkring 33, Garching, Germany