## **Product Information Sheet**


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light

sources						
Supplier's name or trade mark: FIAI						
Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT						
Model identifier: 113382						
Type of light so	urce:					
Lighting techno	logy used:	LED	Non-directional or directional:	NDLS		
Light source cap-type		WIRE				
(or other electric interface)						
Mains or non-mains:		MLS	Connected light source (CLS):	No		
Colour-tuneable light source:		No	Envelope:	-		
High luminance light source:		Yes				
Anti-glare shield:		No	Dimmable:	Only with spe- cific dimmers		
Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		148	Energy efficiency class	E		
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		16 000 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000		
On-mode power (P <sub>on</sub> ), expressed in W		148,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	90	Spectral power dis-	See image		
sions without	Width	134	tribution in the	in last page		
separate con- trol gear, light-	Depth	90	range 250 nm to 800 nm, at full-load			

ing control parts and non-lighting control parts, if any (millimetre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,380			
		nates (x and y)	0,381			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	1	Survival factor	0,90			
the lumen maintenance factor	0,70					
Parameters for LED and OLED mains light sources:						
displacement factor (cos φ1)	0,90	Colour consistency in McAdam ellipses	3			
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-			
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0			

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

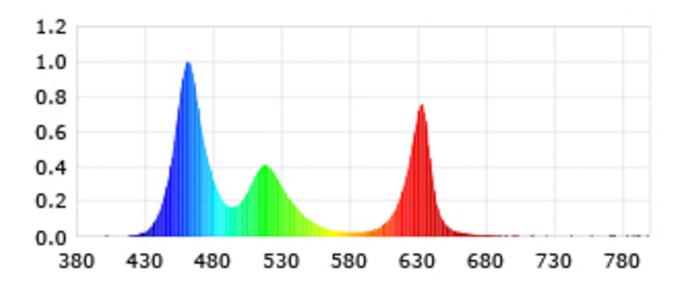

Model placed on the Union market from 31/05/2017



**EPREL registration number:** 805337 https://eprel.ec.europa.eu/qr/805337

Supplier: ISOLED FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

**Customer care service:** 

Name: Vertrieb Website:

Email: office@isoled.at Phone: +43 5372 219999

Address:

Egerbach 48, 6334 Schwoich, AT