## **Product Information Sheet**


COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

sources						
Supplier's name or trade mark: FIAI						
Supplier's address: Vertrieb, Egerbach 48, 6334 Schwoich, AT						
Model identifier: 114888						
Type of light so	urce:					
Lighting technol	logy used:	LED	Non-directional or directional:	DLS		
Light source cap-type		WIRE				
(or other electri	c interface)					
Mains or non-mains:		NMLS	Connected light source (CLS):	No		
Colour-tuneable light source:		No	Envelope:	-		
High luminance	High luminance light source:					
Anti-glare shield:		No	Dimmable:	Only with spe- cific dimmers		
Product parameters						
Parameter		Value	Parameter	Value		
General product parameters:						
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer		8	Energy efficiency class	D		
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		960 in Nar- row cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000		
On-mode power (P <sub>on</sub> ), expressed in W		7,5	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	92		
Outer dimen-	Height	30	Spectral power dis-	See image		
sions without	Width	30	tribution in the	in last page		
separate con- trol gear, light-	Depth	th 30 range 250 nm to 800 nm, at full-load				

ing control parts and non-lighting control parts, if any (millimetre)						
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,386			
		nates (x and y)	0,393			
Parameters for directional light sources:						
Peak luminous intensity (cd)	960	Beam angle in degrees, or the range of beam angles that can be set	45			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	1	Survival factor	0,90			
the lumen maintenance factor	0,70					

(a)<sub>'-'</sub>: not applicable;

(b)<sub>'-'</sub> : not applicable;

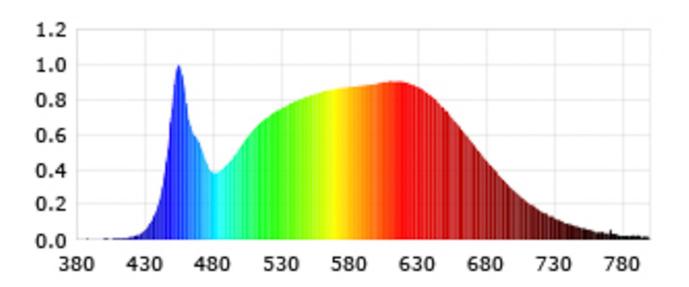

Model placed on the Union market from 23/11/2020



**EPREL registration number:** 805750 https://eprel.ec.europa.eu/qr/805750

Supplier: ISOLED FIAI Handels GmbH (Manufacturer) Website: www.isoled.at

**Customer care service:** 

Name: Vertrieb Website:

Email: office@isoled.at Phone: +43 5372 219999

Address:

Egerbach 48, 6334 Schwoich, AT