

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: SPL

Supplier's address: Schiefer Lighting, Potterbakkerstraat 35, 4871EP Etten-Leur, NL

Model identifier: L023034027

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU5.3		
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	5	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	340 in Narrow cone (90°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	5,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-	
		Chromaticity coordinates (x and y)	0,464 0,412	
Parameters for directional light sources:				
Peak luminous intensity (cd)	600	Beam angle in degrees, or the range of beam angles that can be set	36	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	10	Survival factor	0,70	
the lumen maintenance factor	0,70			

(a) : not applicable;

(b) : not applicable;

SPL Spectrum Test Report

Sample :
Specification : L023034027
Sample No. :
Manufacturer :


Date : 2021-07-01 15:02:36
Sam. Status :
Instrument : HaasSuite(EVERFINE)
Test by : Renee
Assessor : damin

Test Condition

Temperature : 25.3Deg
WL Range : 380nm-780nm
Test Mode : Fast Test

RH : 65.0%
IP : 46258 (71%)
T : 46 ms
Sensitivity : High

Spectrum

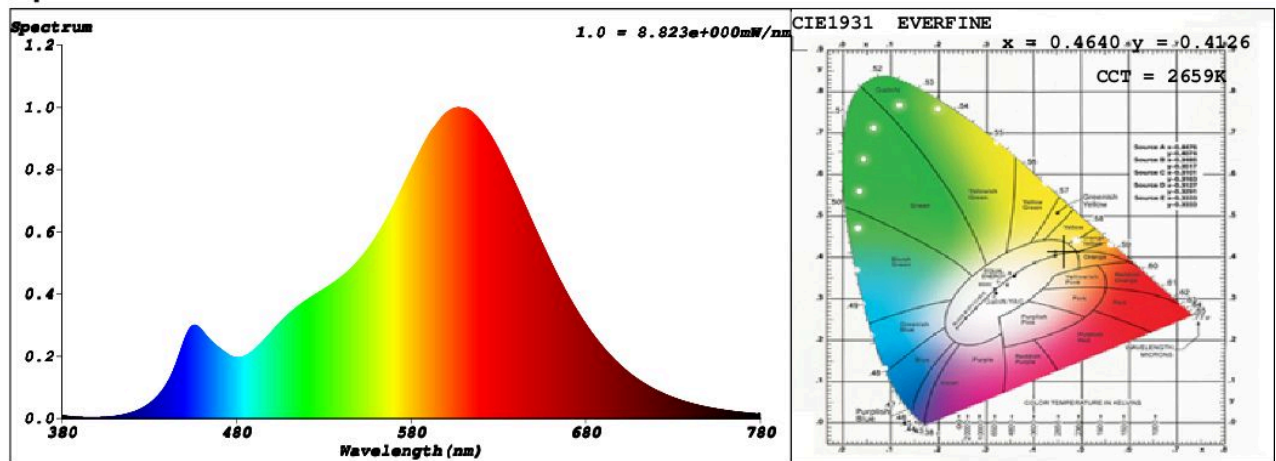

Spectral Distribution

CIE1931 Chromaticity Diagram

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4640$ $y = 0.4126$ / $u' = 0.2643$ $v' = 0.5288$ ($duv=4.18e-04$)
CCT= 2659K Prcp WL: $L_d=584.3nm$ Purity=63.1%
Peak WL: $L_p=608nm$ FWHM: $=111.9nm$ Ratio:R=25.7% G=71.9% B=2.4%

Render Index: $R_a = 83.3$

R1 =83 R2 =94 R3 =93 R4 =81 R5 =83 R6 =94 R7 =81
R8 =58 R9 =10 R10=87 R11=81 R12=81 R13=85 R14=97 R15=74
LEVEL:OUT WHITE:ANSI_2700K

Photometric & Radiometric Parameters

Flux = 394.08 lm Eff. : 0.00 lm/W $F_e = 1.2316 W$

Electrical parameters

V = 0 V I = 0 A P = 0 W PF = 0

Schiefer Professional Lighting

www.spl-lighting.com

Model placed on the Union market from 01/09/2021 to 29/09/2022



EPREL registration number: 831204

<https://eprel.ec.europa.eu/qr/831204>

Supplier: Schiefer Signaal Speciaallampen B.V. (Importer)

Website: www.schiefer.nl

Customer care service:

Name: Schiefer Lighting

Website: www.schiefer.nl

Email: info@schiefer.nl

Phone: +31765037717

Address:

Potterbakkerstraat 35
4871EP Etten-Leur
Netherlands